



US008174346B1

(12) **United States Patent**
Koren

(10) **Patent No.:** **US 8,174,346 B1**

(45) **Date of Patent:** **May 8, 2012**

(54) **PORTABLE MAGNETIZER SYSTEMS**

(75) Inventor: **Trygve Paul Koren**, Newport, OH (US)

(73) Assignee: **Magnum Magnetics Corporation**,
Marietta, OH (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 104 days.

(21) Appl. No.: **12/851,518**

(22) Filed: **Aug. 5, 2010**

Related U.S. Application Data

(60) Provisional application No. 61/232,297, filed on Aug. 7, 2009, provisional application No. 61/251,278, filed on Oct. 13, 2009.

(51) **Int. Cl.**
H01F 7/20 (2006.01)
H01F 13/00 (2006.01)

(52) **U.S. Cl.** **335/284**; 428/900

(58) **Field of Classification Search** 335/284;
428/900

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,125,628	A	12/1933	Fredrickson	
5,063,367	A	11/1991	Lee	
6,094,120	A *	7/2000	Okamoto	335/284
6,310,532	B1	10/2001	Santa Cruz et al.	
6,356,176	B1 *	3/2002	Anderson	335/284
6,668,689	B1 *	12/2003	Lai	81/451
7,728,706	B2	6/2010	Ogden, Jr. et al.	
2004/0009370	A1 *	1/2004	Abe	428/693
2007/0191670	A1	8/2007	Spector	
2008/0224806	A1	9/2008	Ogden et al.	
2008/0278272	A1	11/2008	Arnold	

FOREIGN PATENT DOCUMENTS

JP	6036402	B2	5/1994
KR	20-1996-0032614	U	10/1996

* cited by examiner

Primary Examiner — Elvin G Enad



Assistant Examiner — Alexander Talpalatskiy

(74) *Attorney, Agent, or Firm* — Stoneman Law Patent Group; Martin L. Stoneman; Eric Fish

(57) **ABSTRACT**

Portable magnetizer systems designed for on-site use, related to magnetizing magnetizable sheets, enclosed in a case which is hand-carryable.

66 Claims, 13 Drawing Sheets

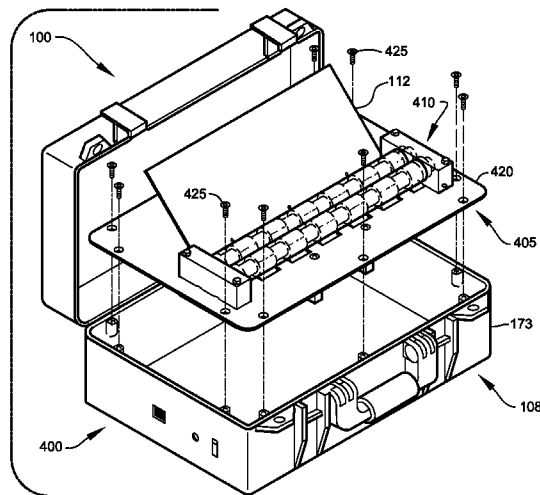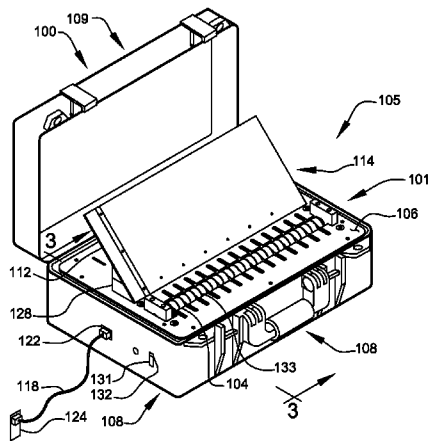

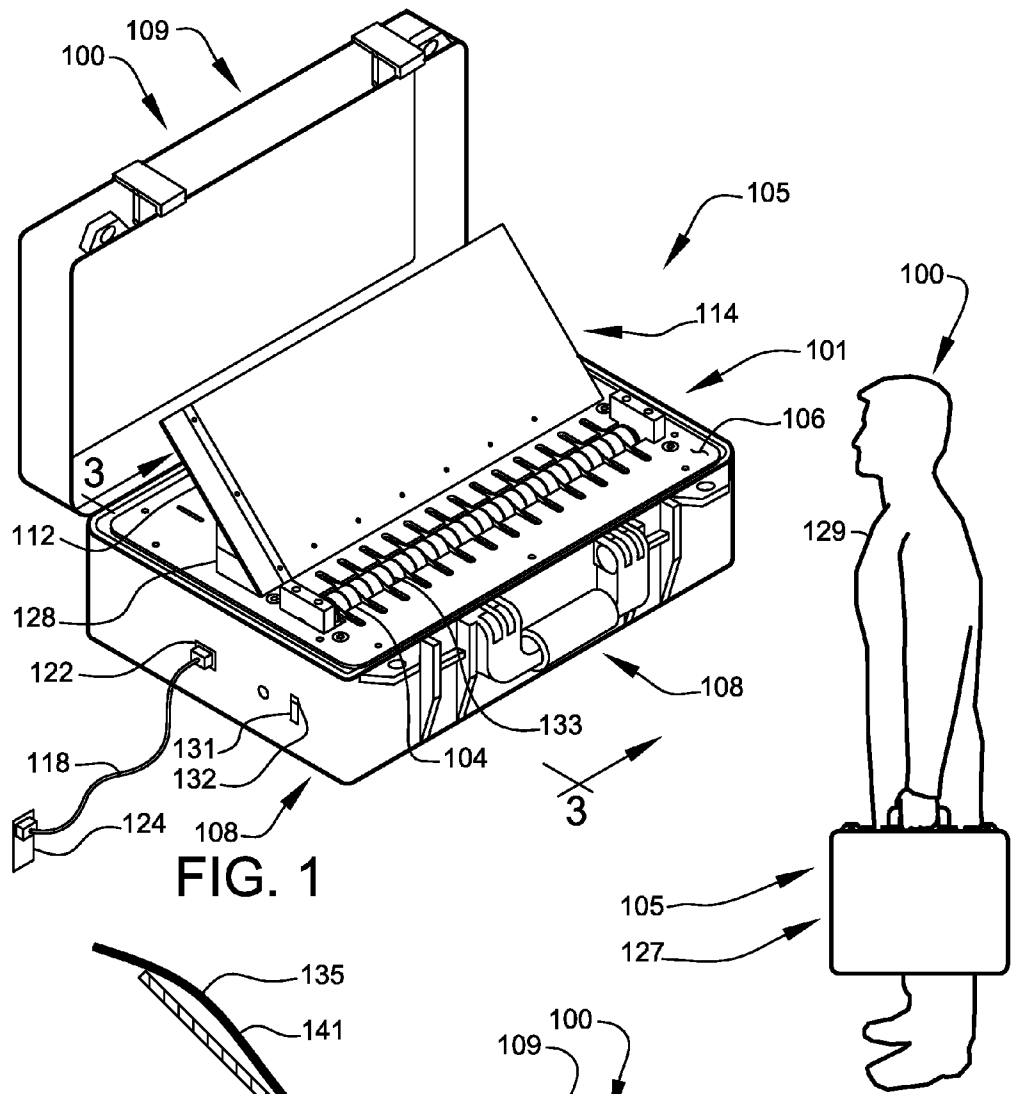


FIG. 1

FIG. 2

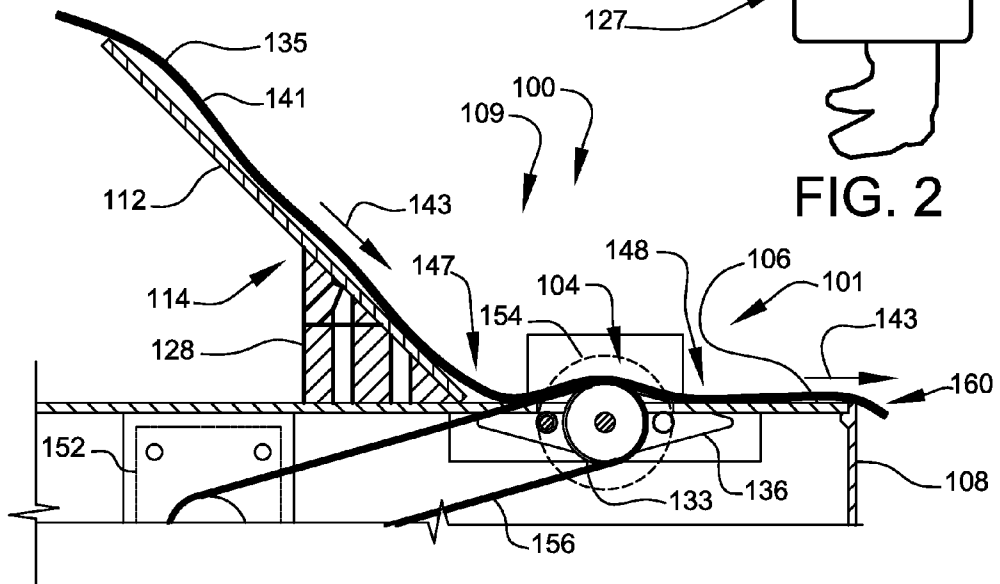


FIG. 3

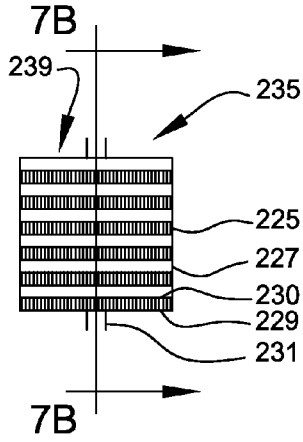


FIG. 7A




FIG. 7B

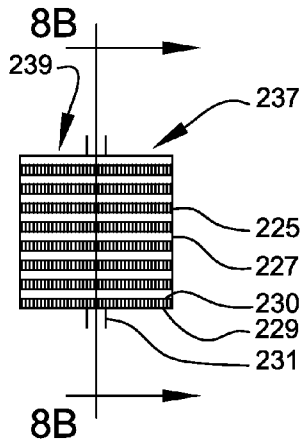


FIG. 8A




FIG. 8B

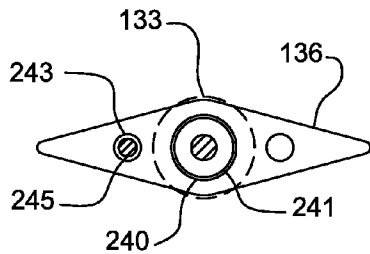


FIG. 9

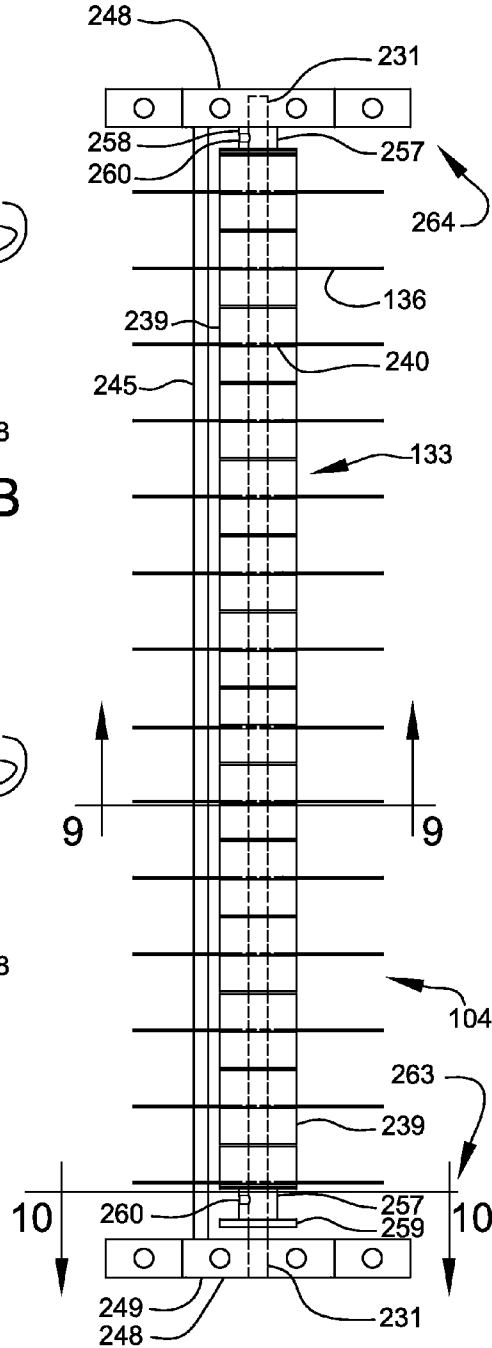


FIG. 6

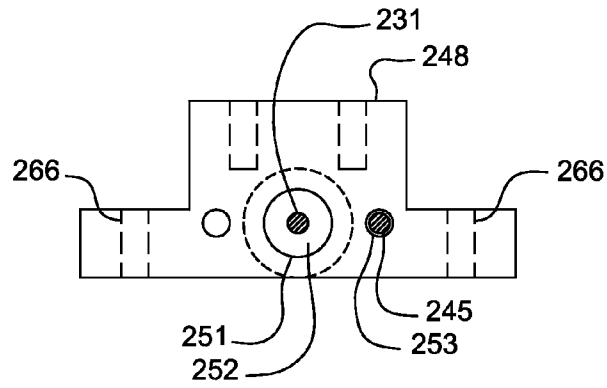


FIG. 10

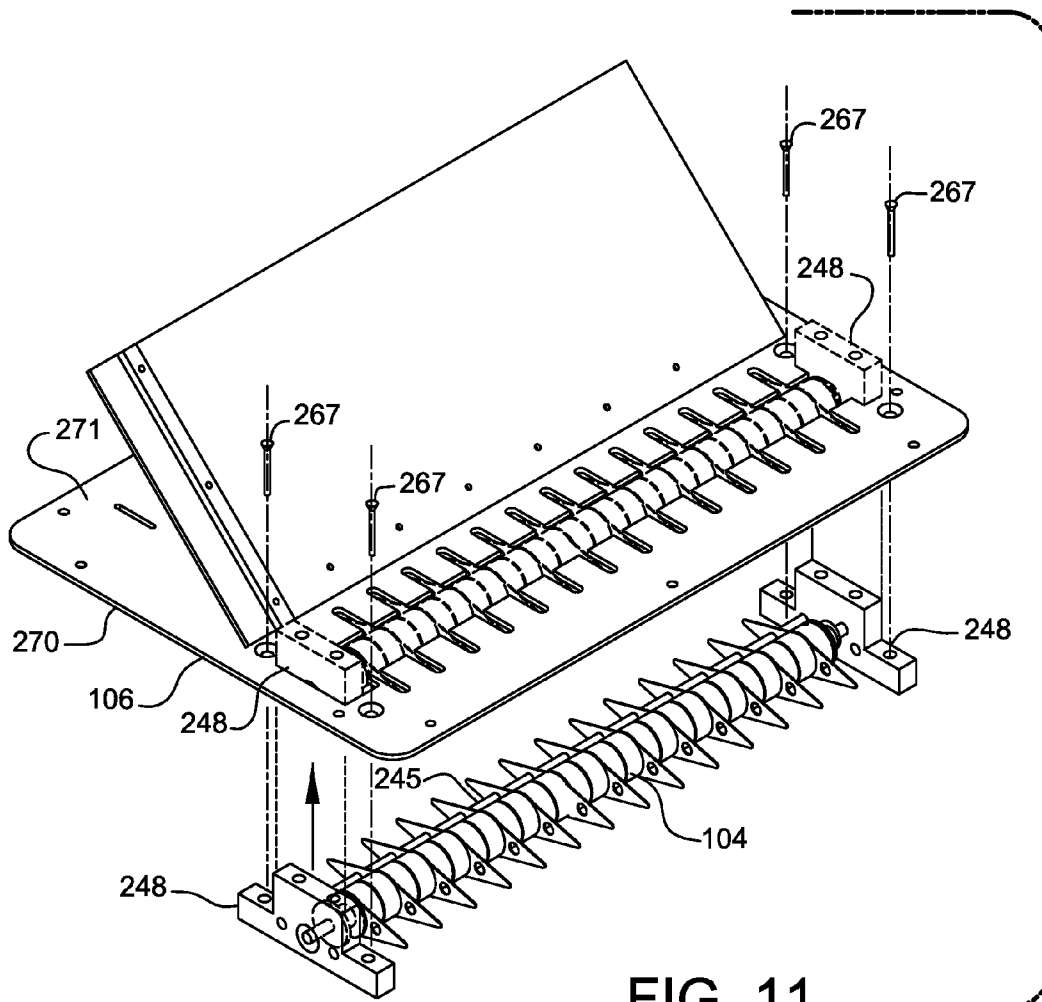


FIG. 11

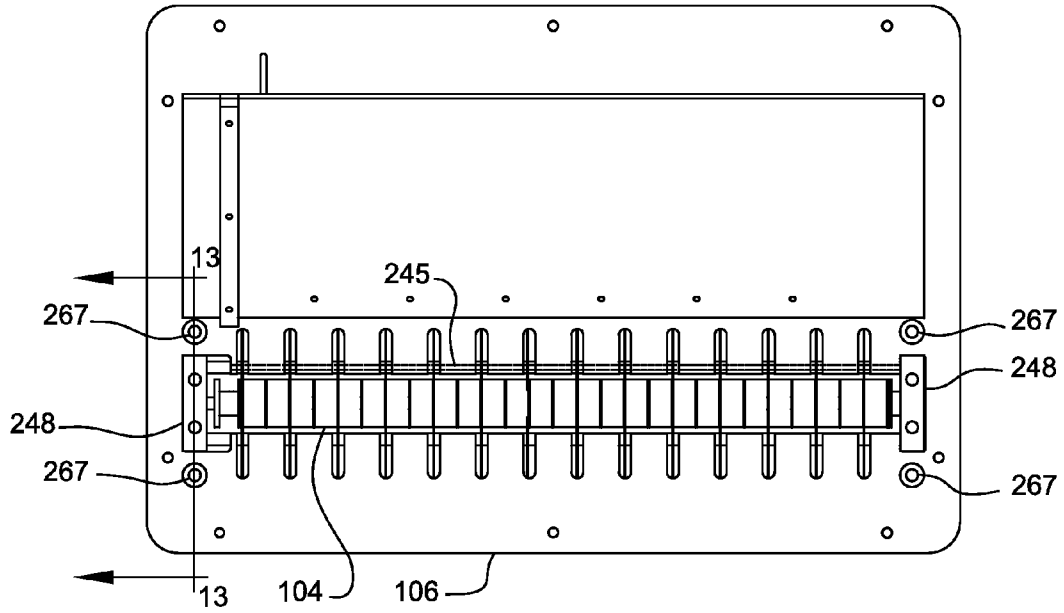


FIG. 12

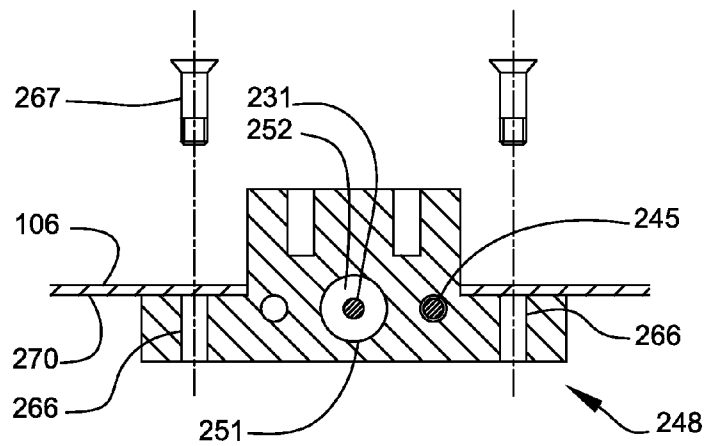


FIG. 13

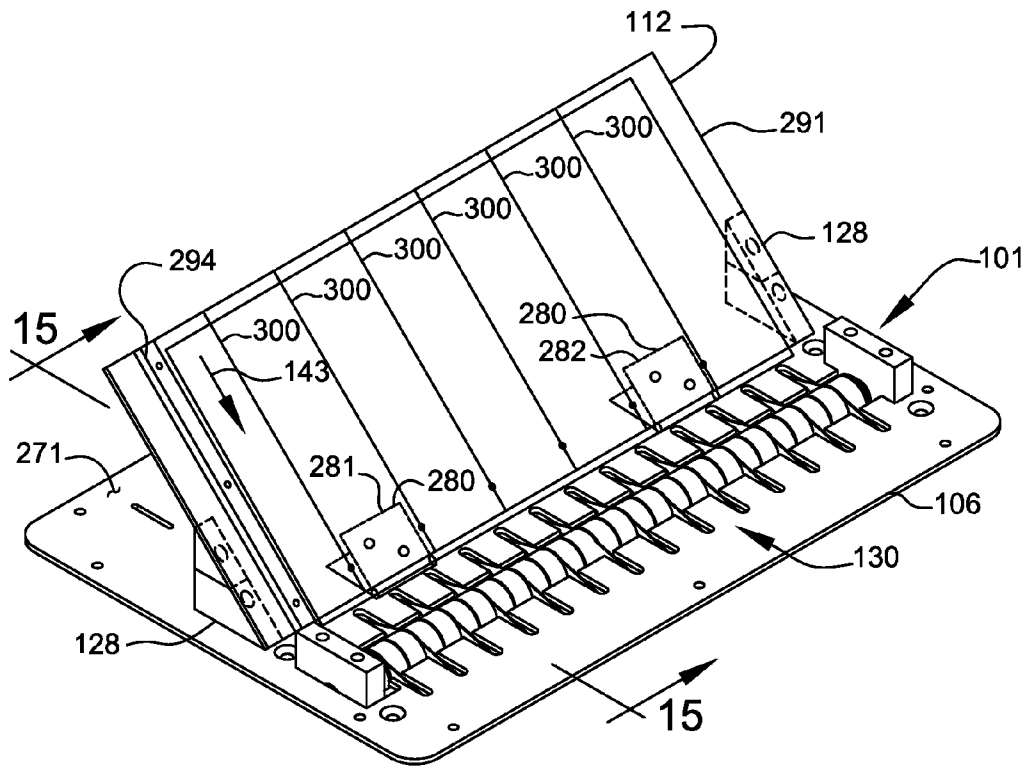


FIG. 14

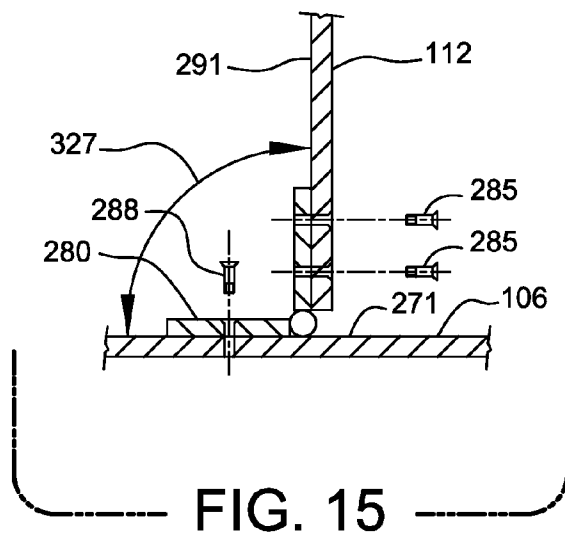
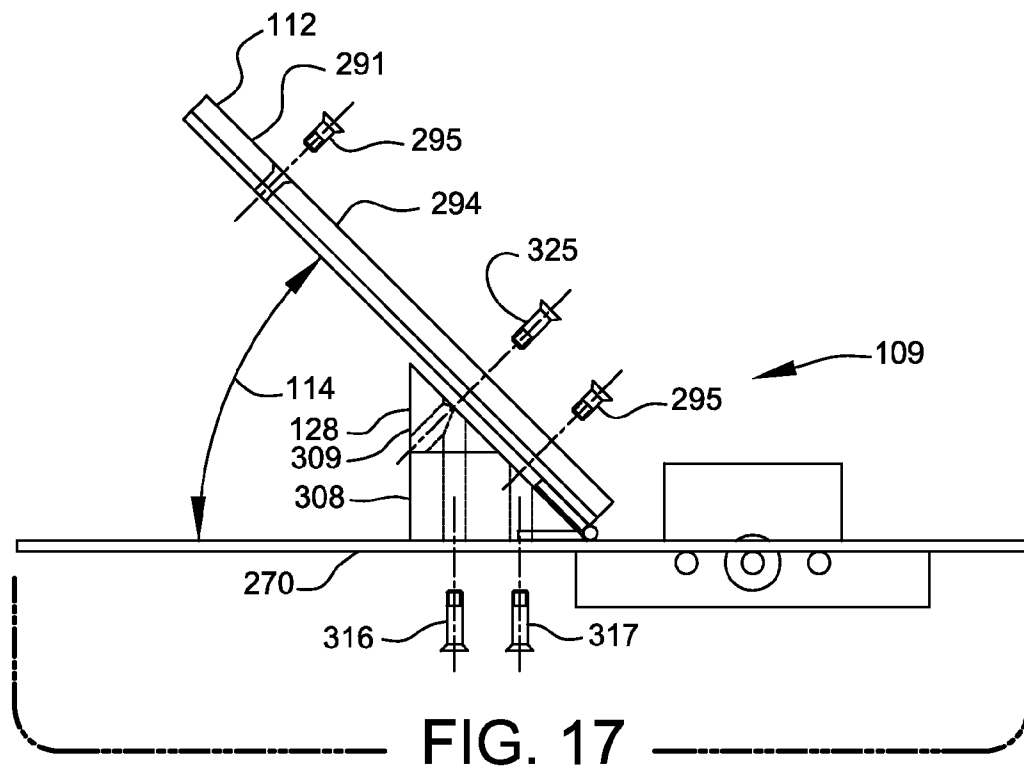
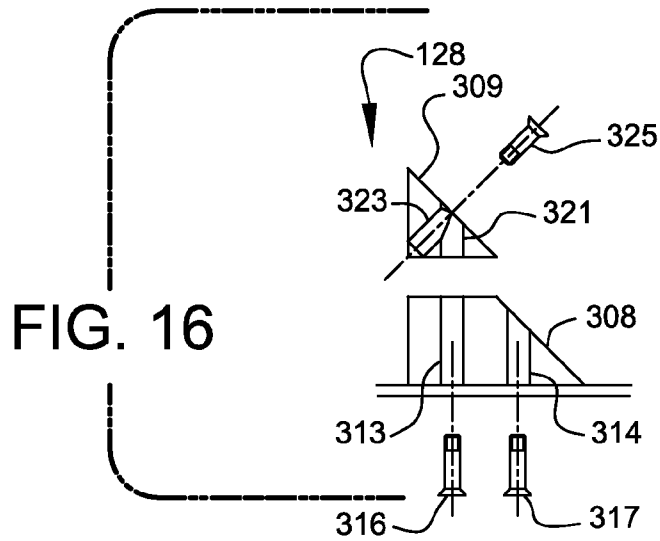


FIG. 15



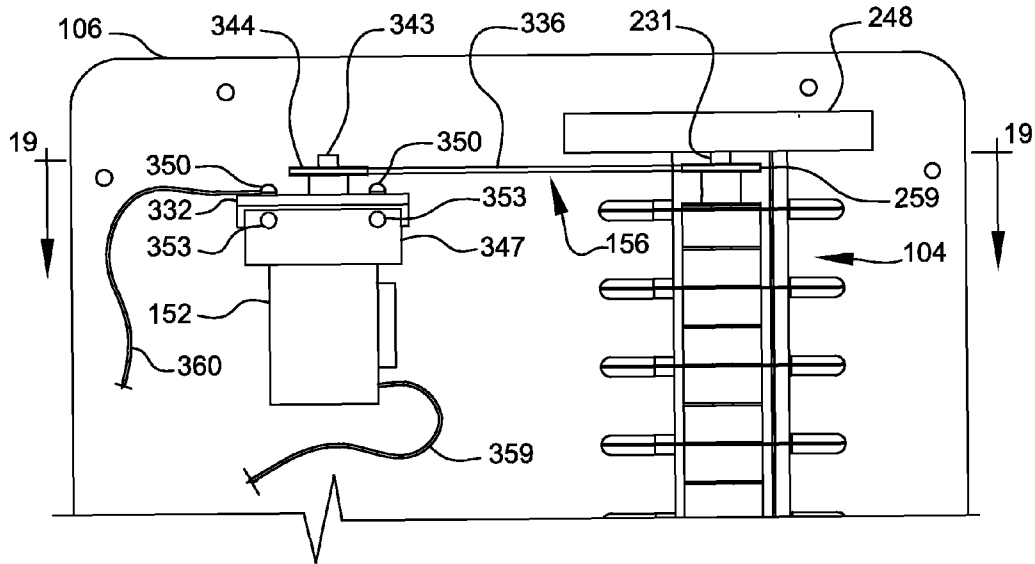


FIG. 18

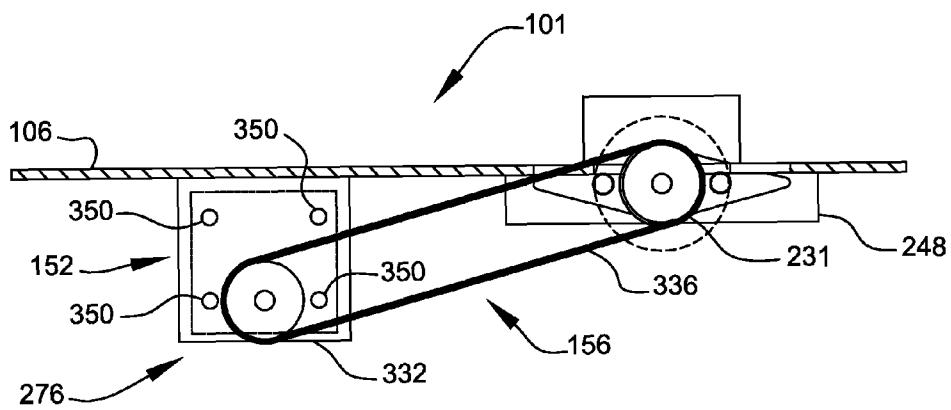


FIG. 19

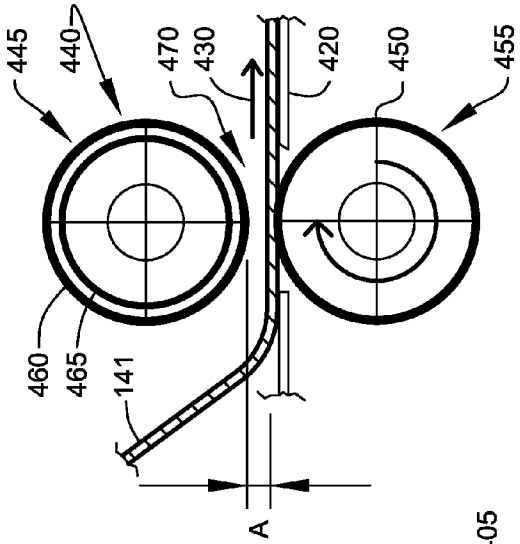


FIG. 21

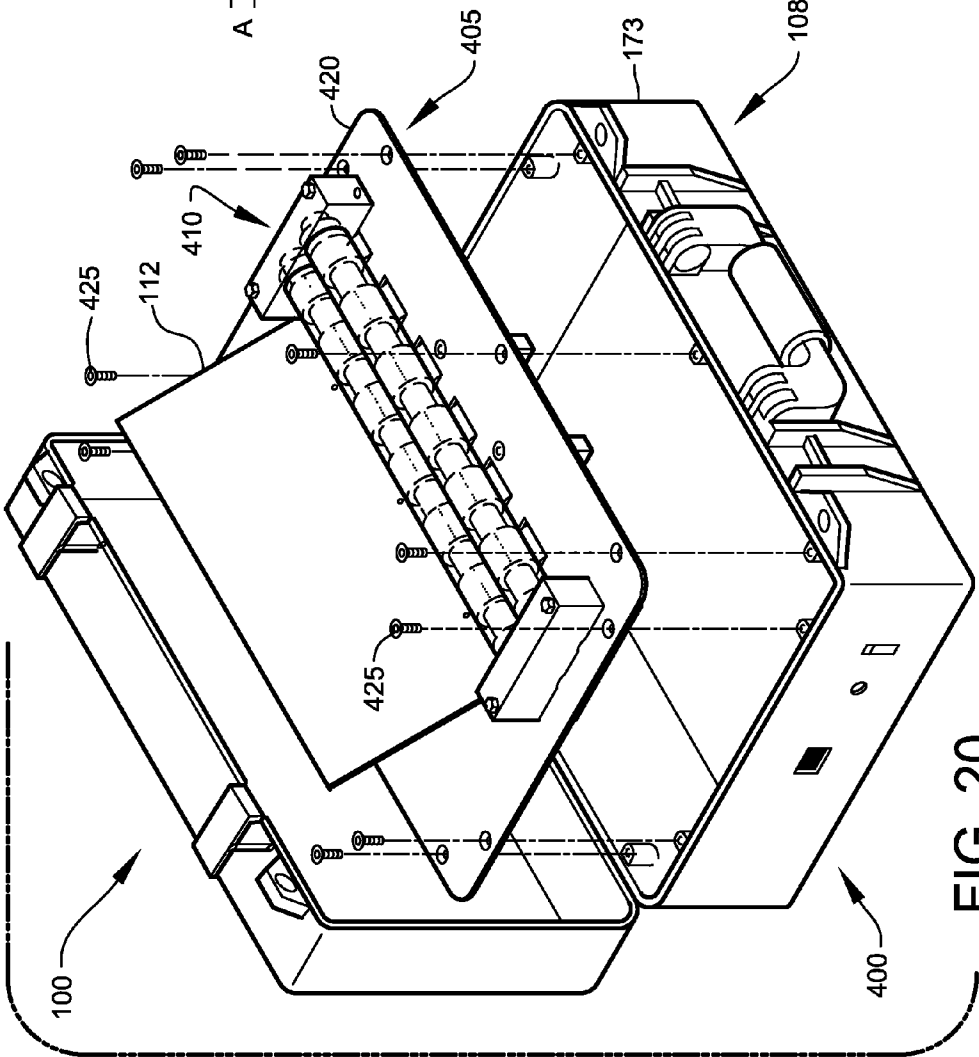
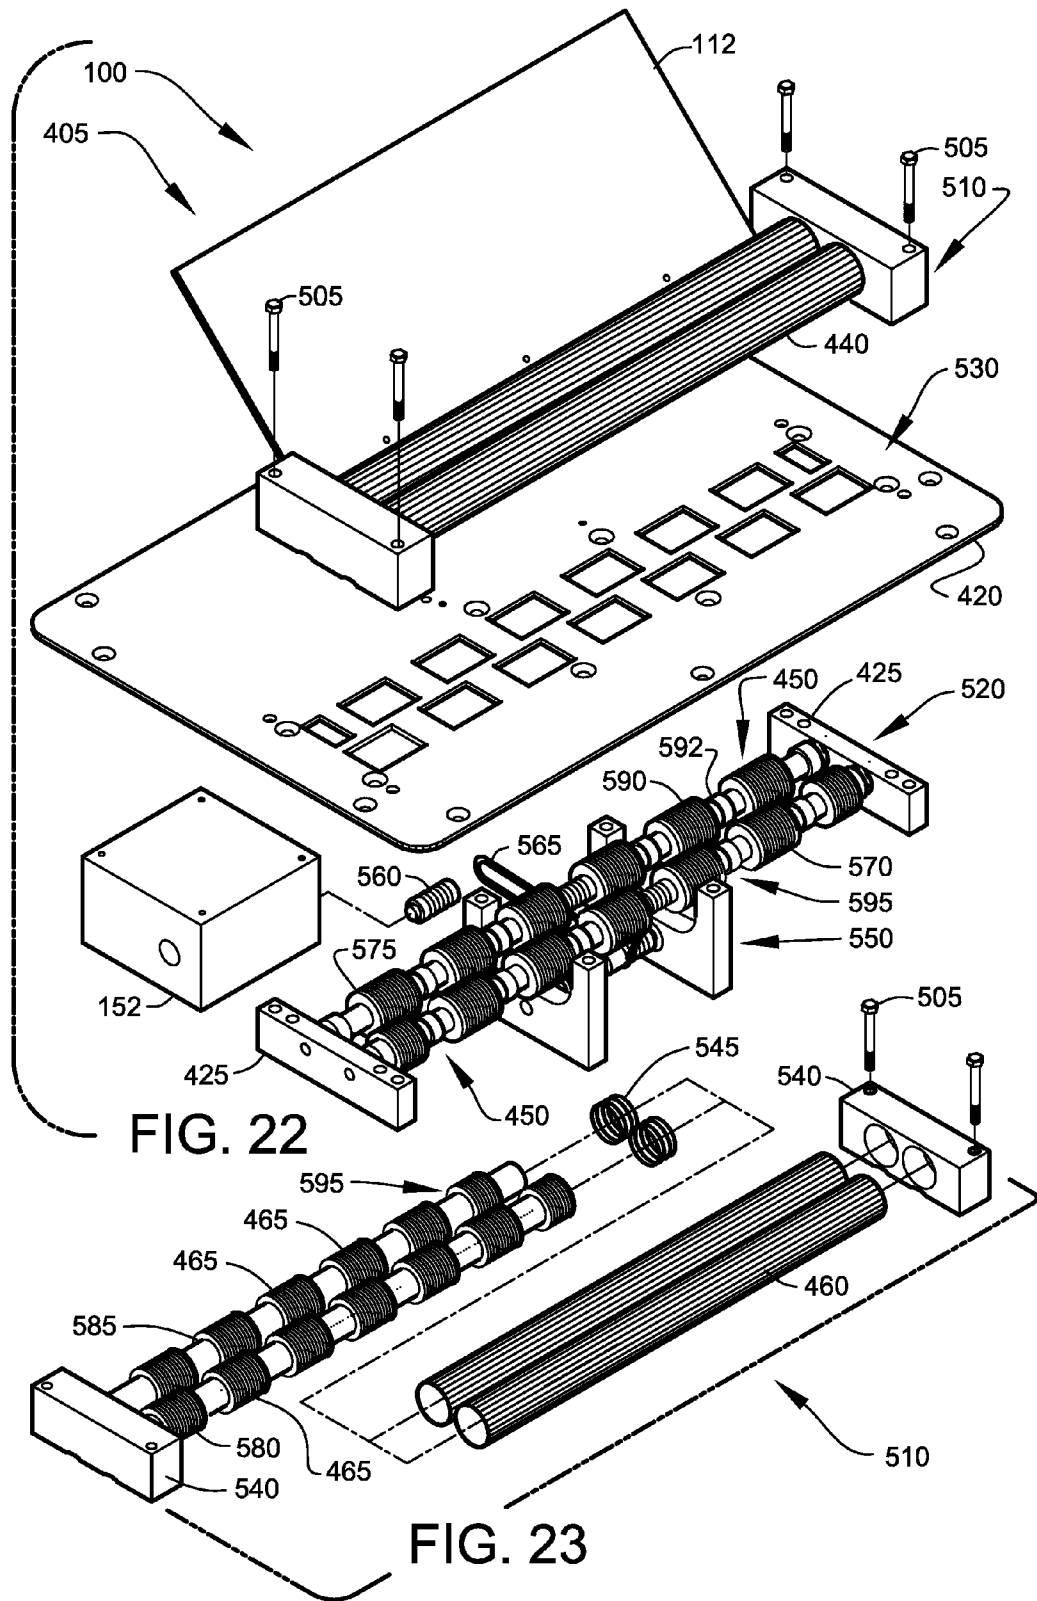


FIG. 20



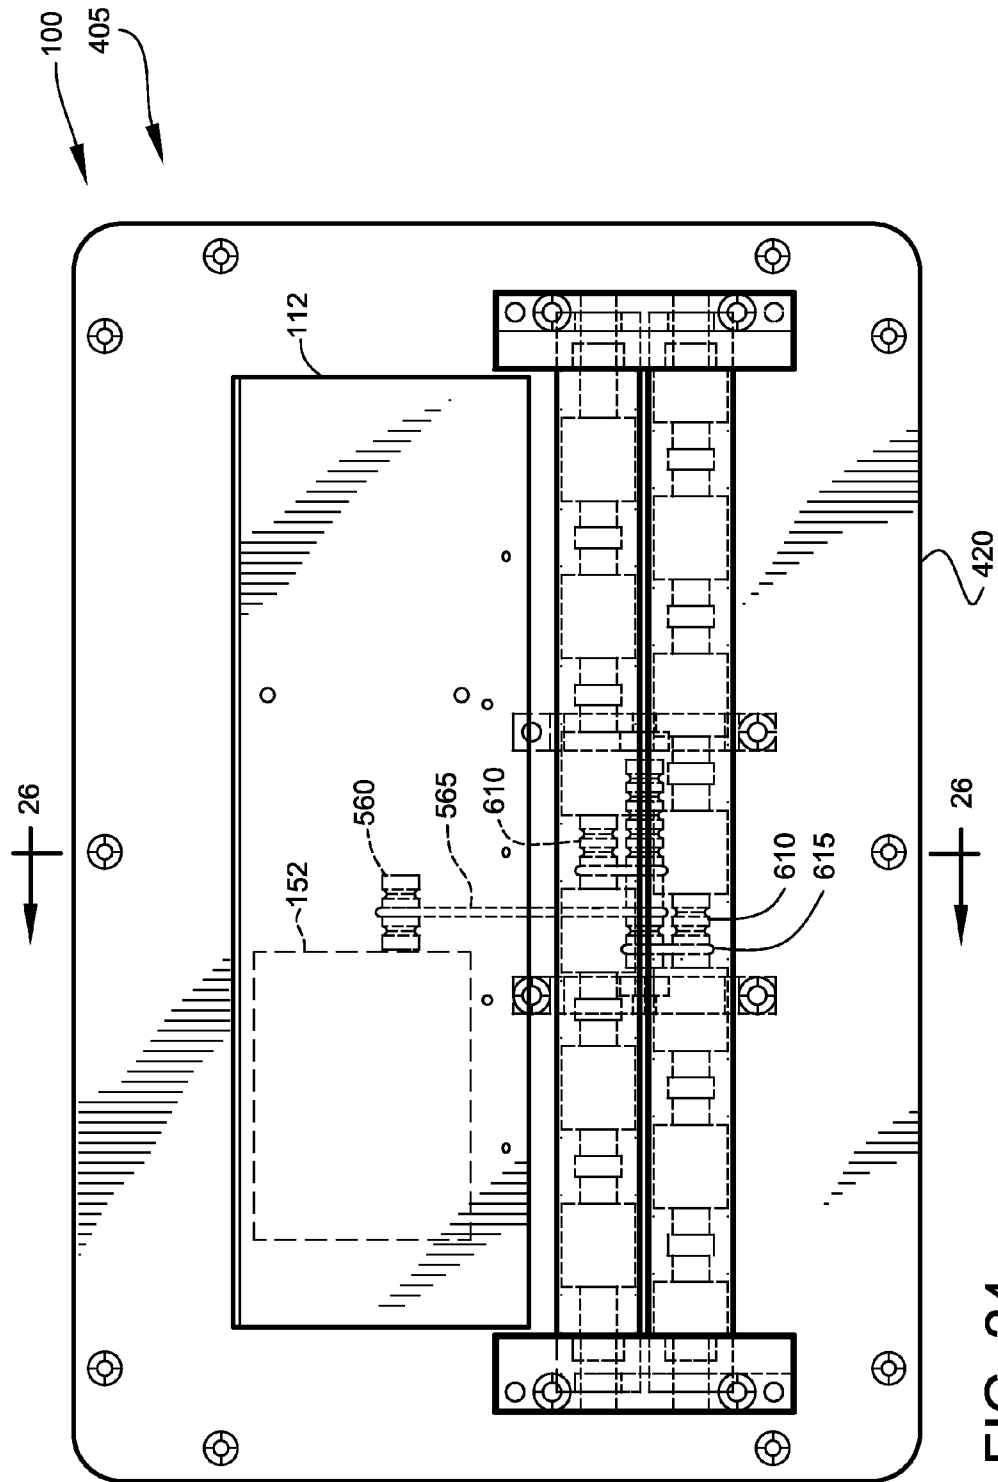


FIG. 24

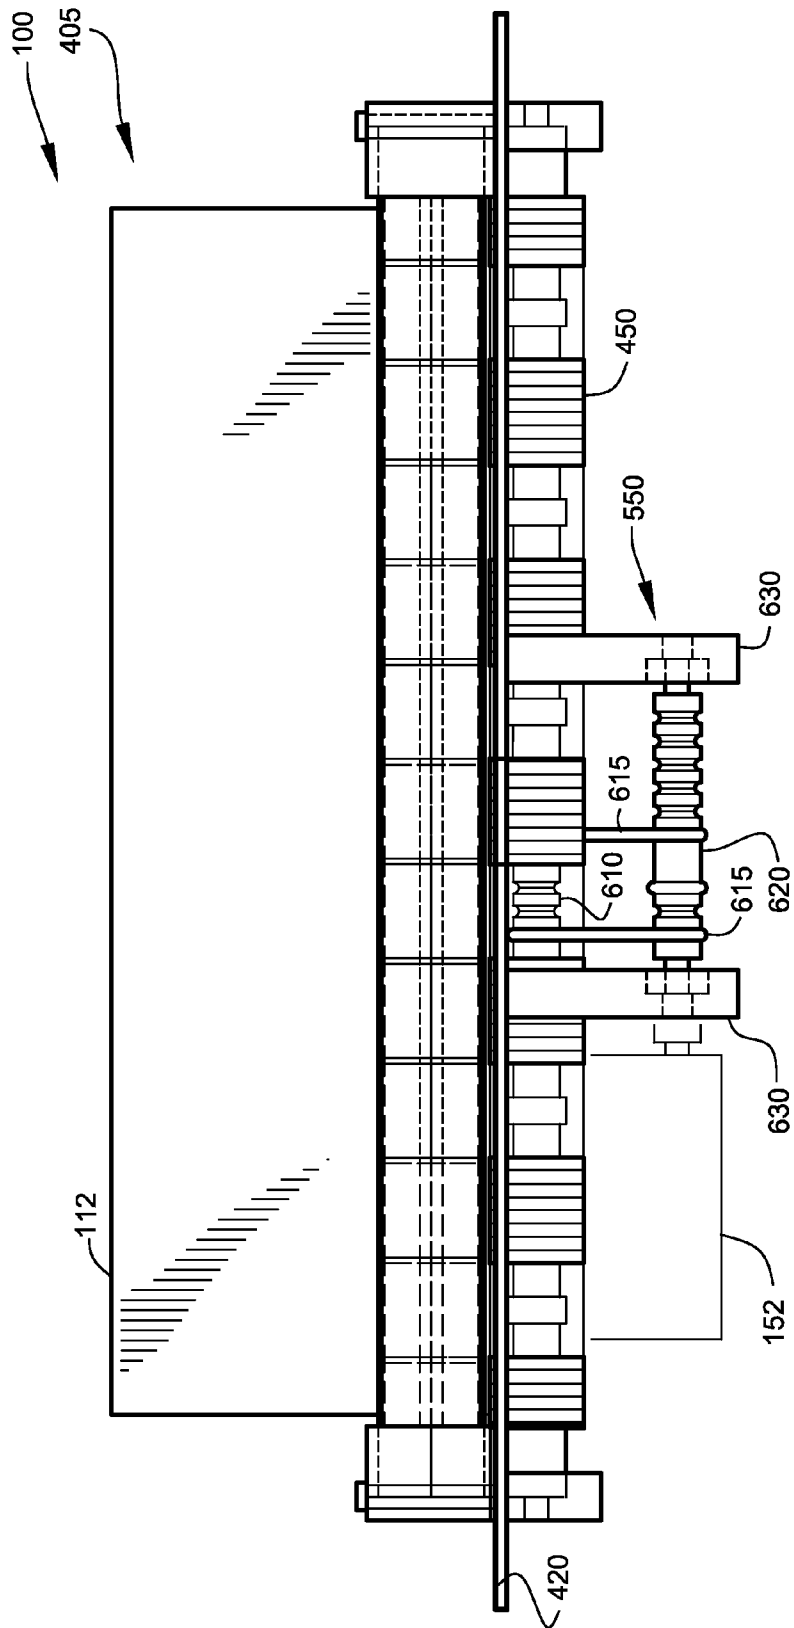


FIG. 25

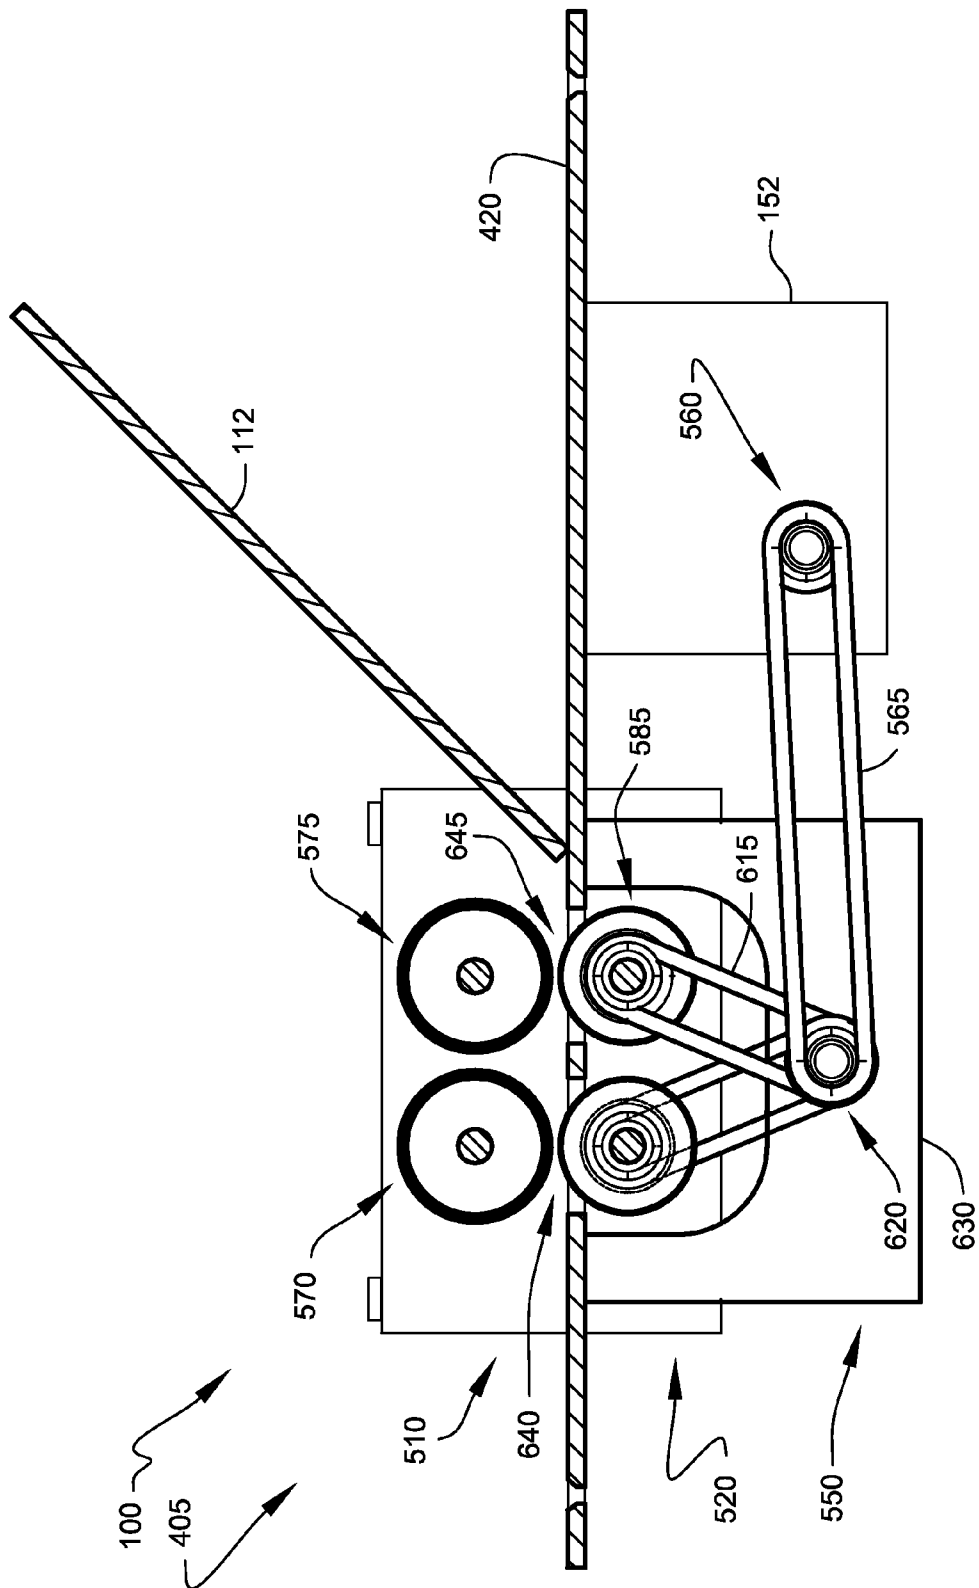


FIG. 26

PORTABLE MAGNETIZER SYSTEMS**CROSS REFERENCE TO RELATED APPLICATIONS**

The present application is related to and claims priority from prior provisional application Ser. No. 61/232,297, filed Aug. 7, 2009, entitled "PORTABLE MAGNETIZER SYSTEMS"; and, this application is related to and claims priority from prior provisional application Ser. No. 61/251,278, filed Oct. 13, 2009, entitled "PORTABLE MAGNETIZER SYSTEMS", the contents of each of which is incorporated herein by this reference and is not admitted to be prior art with respect to the present invention by the mention in this cross-reference section.

BACKGROUND

This invention relates to providing a system for a portable magnetizer. More particularly this invention relates to providing a portable system for magnetizing batches of magnetizable sheets.

Magnetizing of magnetizable sheeting is either conducted during manufacture or in large production lines. When only a small batch of sheets needs magnetizing, it is inefficient to utilize large scale methods of magnetization. A high-volume production magnetizer is expensive and may take up too much space for the benefit of smaller scale, occasional use on-site. Likewise, taking a batch of sheets in to a high-volume production company for magnetization slows down production and consequently the high-volume production company charges increased fees. A system is needed to magnetize on-site, for less cost, in a portable and space saving manner.

OBJECTS AND FEATURES OF THE INVENTION

A primary object and feature of the present invention is to provide a system overcoming the above-mentioned problem.

It is a further object and feature of the present invention to provide such a system in a portable storage case.

Another object and feature of the present invention is to provide such a system having a rotating magnetic roller to magnetize magnetizable planar sheets.

A further object and feature of the present invention is to provide such a system that magnetizes magnetizable planar sheets at a rate of about 15 feet/min.

It is an additional object and feature of the present invention to provide such a system that is capable of being carried by hand.

Another object and feature of the present invention is to provide such a system having a magnetic roller of discrete field-producing laminations.

Yet a further object and feature of the present invention is to provide such a system having sheet decouplers to separate a magnetized sheet from such magnetic roller.

It is another object and feature of the present invention to provide such a system having a magnetic field between 4000 Gauss and 6000 Gauss.

A further object and feature of the present invention is to provide such a system that is capable of magnetizing magnetizable planar sheets having a width of less than 13 inches.

Another primary object and feature of the present invention is to provide such a system that is capable of high-energy magnetization of a high-energy magnetizable sheet.

A further primary object and feature of the present invention is to provide such a system that is efficient, inexpensive,

and handy. Other objects and features of this invention will become apparent with reference to the following descriptions.

SUMMARY OF THE INVENTION

In accordance with a preferred embodiment hereof, this invention provides a system, relating to enabling magnetization of at least one planar sheet of flexible magnetizable material, such system comprising: magnetizer means for providing at least one magnetic field source; positioner means for permitting positioning the at least one planar sheet into at least one magnetizing interaction relationship with such magnetizer means; enclosure means for enclosing such magnetizer means and such positioner means; and hand-carrier means for permitting hand-carrying of such enclosure means. Moreover, it provides such a system further comprising axial-holder means for axially-holding such magnetizer means along a single longitudinal axis. Additionally, it provides such a system further comprising rotary movement generator means for generating rotary movement of such axial-holder means. Also, it provides such a system wherein such enclosure means comprises securable briefcase means for providing briefcase-securing of such enclosure means.

In accordance with another preferred embodiment hereof, this invention provides a system, relating to enabling magnetization of at least one planar sheet of flexible magnetizable material, such system comprising: at least one magnetizer structured and arranged to provide at least one magnetic field source; at least one positioner structured and arranged to permit positioning the at least one planar sheet into at least one magnetizing interaction relationship with such at least one magnetizer; at least one enclosure structured and arranged to enclose such at least one magnetizer and such at least one positioner; and at least one hand-carrier structured and arranged to permit hand-carrying of such at least one enclosure. In addition, it provides such a system wherein such at least one magnetizer comprises at least one permanent magnet.

And, it provides such a system wherein: such at least one magnetizer comprises at least one magnetizer bar comprising at least one longitudinal axis; such at least one magnetizer bar comprises a plurality of discrete field-producing lamination-sets spaced along such at least one longitudinal axis; each discrete field-producing lamination-set of such plurality comprises at least one circular magnetic disk and at least one circular flux-conducting spacer magnetically coupled with such at least one circular magnetic disk; and each such at least one circular magnetic disk and each such at least one circular flux-conducting spacer are coaxial with such at least one first longitudinal axis. Further, it provides such a system further comprising at least one axial-holder structured and arranged to axially-hold such at least one magnetizer bar along such at least one longitudinal axis.

Even further, it provides such a system further comprising at least one rotary movement generator structured and arranged to generate rotary movement of such at least one axial-holder and such at least one magnetizer bar. Moreover, it provides such a system wherein such at least one magnetizer bar is structured and arranged to magnetically couple to the at least one planar sheet to transfer movement to the at least one planar sheet. Additionally, it provides such a system wherein such at least one magnetizer bar is structured and arranged to rotate to move the at least one planar sheet through at least one magnetic field. Also, it provides such a system further comprising at least one planar sheet decoupler structured and arranged to decouple the at least one planar

sheet from such at least one magnetizer bar during movement of the at least one planar sheet through at least one magnetic field. In addition, it provides such a system wherein such at least one magnetizer bar is structured and arranged to rotate to move the at least one planar sheet through such at least one magnetic field at a rate from about 10 feet per minute to about 50 feet per minute.

And, it provides such a system wherein such at least one magnetizer bar rotates to move the at least one planar sheet through such at least one magnetic field at a rate of at about 15 feet/min. Further, it provides such a system wherein such at least one sheet decoupler comprises a plurality of decoupler elements. Even further, it provides such a system wherein each of such plurality of decoupler elements are spaced about every inch along such at least one longitudinal axis. Moreover, it provides such a system wherein such at least one magnetizer bar comprises from about 10 to about 20 laminations per inch. Additionally, it provides such a system wherein such at least one magnetizer bar comprises exactly 12 laminations per inch.

Also, it provides such a system wherein such at least one magnetizer bar comprises a magnetic field of about 5000 Gauss to about 6000 Gauss. In addition, it provides such a system wherein such at least one magnetizer bar comprises exactly 16 laminations per inch. And, it provides such a system wherein such at least one magnetizer bar comprises a magnetic field of about 4000 Gauss to about 5000 Gauss. Further, it provides such a system wherein such at least one positioner comprises at least one user-adjustable planar sheet feeder structured and arranged to user-adjustably feed the at least one planar sheet into such at least one magnetizer. Even further, it provides such a system wherein such at least one adjustable planar sheet feeder accepts a sheet width of less than about 13 inches. Moreover, it provides such a system wherein such at least one adjustable planar sheet feeder collapses to allow containment in such at least one enclosure when stored.

Additionally, it provides such a system wherein such at least one rotary movement generator comprises at least one motor. Also, it provides such a system further comprising: at least one power cord structured and arranged to assist power transfer from at least one power source to such at least one rotary movement generator; wherein such at least one power cord may be contained in such at least one enclosure when stored. In addition, it provides such a system wherein such at least one enclosure comprises at least one securable briefcase structured and arranged to provide briefcase securing of such at least one enclosure. And, it provides such a system wherein such at least one hand-carrier comprises at least one handle. Further, it provides such a system further comprising at least one mounting member structured and arranged to mount, in at least one operational alignment, such at least one positioner and such at least one magnetizer to such at least one enclosure.

Even further, it provides such a system further comprising at least one mounting member structured and arranged to mount, in at least one operational alignment, such at least one positioner and such at least one magnetizer to such at least one enclosure. Even further, it provides such a system wherein such at least one mounting member comprises at least one aligning-mounting plate. Even further, it provides such a system wherein such at least one aligning-mounting plate mounts to such at least one enclosure. Even further, it provides such a system wherein such at least one aligning-mounting plate divides such at least one enclosure into: at least one operation-isolated-region structured and arranged to assist protection of such at least one magnetizer and such at

least one rotary movement generator from external interaction, during operation of such at least one magnetizer; and at least one operation-accessible-region structured and arranged to permit user access during operation of such at least one magnetizer. Even further, it provides such a system wherein such at least one enclosure comprises at least one aperture structured and arranged to permit operating power connection between such at least one rotary movement generator and external power source.

In accordance with another preferred embodiment hereof, this invention provides a system, relating to enabling magnetization of at least one planar sheet of flexible magnetizable material, such system comprising: at least one magnetizer structured and arranged to provide at least one magnetic field source; at least one positioner structured and arranged to permit positioning the at least one planar sheet into at least one magnetizing interaction relationship with such at least one magnetizer; at least one enclosure structured and arranged to enclose such at least one magnetizer and such at least one positioner; and at least one hand-carrier structured and arranged to permit hand-carrying of such at least one enclosure. Moreover, it provides such a system wherein such at least one magnetizer comprises at least one permanent magnet. Additionally, it provides such a system wherein: such at least one magnetizer comprises at least one magnetizer bar comprising at least one longitudinal axis; such at least one magnetizer bar comprises a plurality of discrete field-producing lamination-sets spaced along such at least one longitudinal axis; each discrete field-producing lamination-set of such plurality comprises at least one circular magnetic disk and at least one circular flux-conducting spacer magnetically coupled with such at least one circular magnetic disk; and each such at least one circular magnetic disk and each such at least one circular flux-conducting spacer are coaxial with such at least one longitudinal axis. Also, it provides such a system further comprising at least one axial-holder structured and arranged to axially-hold such at least one magnetizer bar along such at least one longitudinal axis.

In addition, it provides such a system further comprising at least one rotary movement generator structured and arranged to generate rotary movement of such at least one axial-holder and such at least one magnetizer bar. And, it provides such a system wherein such at least one magnetizer bar is structured and arranged to magnetically couple to the at least one planar sheet, when the at least one planar sheet is in position to pass through at least one magnetic field produced by such at least one magnetic field source, to transfer movement to the at least one planar sheet. Further, it provides such a system wherein such at least one magnetizer bar is structured and arranged to rotate to move the at least one planar sheet through at least one magnetic field. Even further, it provides such a system further comprising at least one planar sheet decoupler structured and arranged to decouple the at least one planar sheet from such at least one magnetizer bar during movement of the at least one planar sheet through at least one magnetic field. Moreover, it provides such a system wherein, when the at least one planar sheet is in position and coupled to such at least one magnetizer bar, such at least one magnetizer bar is structured and arranged to rotate to move the at least one planar sheet through such at least one magnetic field at a rate from about 10 feet per minute to about 50 feet per minute. Additionally, it provides such a system wherein, when the at least one planar sheet is in position and coupled to such at least one magnetizer bar, such at least one magnetizer bar is structured and arranged to rotate to move the at least one planar sheet through such at least one magnetic field at a rate of at about 15 feet/min.

5

Also, it provides such a system wherein such at least one sheet decoupler comprises a plurality of decoupler elements. In addition, it provides such a system wherein each of such plurality of decoupler elements are spaced about every inch along such at least one longitudinal axis. And, it provides such a system wherein such at least one sheet decoupler comprises at least one planar rigid decoupler plate. Further, it provides such a system wherein such at least one planar rigid decoupler plate comprises a plurality of apertures structured and arranged to permit protrusion of at least one portion of such at least one magnetizer bar to assist movement of the at least one planar sheet, when the at least one planer sheet is in position and coupled to such at least one magnetizer bar. Even further, it provides such a system wherein such at least one magnetizer bar comprises at least one magnetizer bar set situate partially above and partially below a movement track of the at least one planar sheet. Moreover, it provides such a system wherein such at least one magnetizer bar set comprises at least two magnetizer bar sub-sets, each such magnetizer bar sub-set comprising: at least one magnetic field source above the movement track; at least one magnetic field source below the movement track; and at least one flux field situate between such at least one magnetic field source above the movement track and such at least one magnetic field source below the movement track; wherein such at least one flux field crosses the movement track.

Additionally, it provides such a system further comprising at least one magnetic field source aligner structured and arranged to align such at least one magnetic field source above the movement track and such at least one magnetic field source below the movement track in such manner as to maximize such at least one flux field crossing the movement track. Also, it provides such a system wherein each upper magnetic field source is encased to provide at least one smooth surface. In addition, it provides such a system wherein an encasing material allows maximum transmission of magnetic field. And, it provides such a system wherein such encasing material comprises brass. Further, it provides such a system wherein such at least one magnetizer bar comprises at least one magnetizer bar set situate below a movement track of the at least one planar sheet. Even further, it provides such a system wherein each such discrete field-producing lamination-set comprises from about 10 to about 20 laminations per inch. Moreover, it provides such a system wherein each such discrete field-producing lamination-set comprises exactly 12 laminations per inch.

Additionally, it provides such a system wherein each such discrete field-producing lamination-set comprises a magnetic field of about 5000 Gauss to about 6000 Gauss. Also, it provides such a system wherein each such discrete field-producing lamination-set comprises exactly 16 laminations per inch. In addition, it provides such a system wherein each such discrete field-producing lamination-set comprises a magnetic field of about 4000 Gauss to about 5000 Gauss. And, it provides such a system wherein such at least one rotary movement generator comprises at least one motor. Further, it provides such a system further comprising: at least one power cord structured and arranged to assist power transfer from at least one external power source to such at least one rotary movement generator; wherein such at least one power cord may be contained within such at least one enclosure when stored. Even further, it provides such a system further comprising at least one mounting member structured and arranged to mount, in at least one operational alignment, such at least one positioner and such at least one magnetizer to such at least one enclosure. Moreover, it provides such a system wherein such at least one mounting member comprises at

6

least one aligning-mounting plate. Additionally, it provides such a system, wherein such at least one aligning-mounting plate comprises such at least one planar rigid decoupler plate. Also, it provides such a system wherein such at least one planar rigid decoupler plate comprises a plurality of apertures structured and arranged to permit protrusion of at least one portion of such at least one magnetizer bar to assist movement of the at least one planar sheet.

In addition, it provides such a system wherein such at least one aligning-mounting plate mounts to such at least one enclosure. And, it provides such a system wherein such at least one aligning-mounting plate divides such at least one enclosure into: at least one operation-isolated-region structured and arranged to assist protection of such at least one magnetizer and such at least one rotary movement generator from external interaction, during operation of such at least one magnetizer; and at least one operation-accessible-region structured and arranged to permit user access during operation of such at least one magnetizer. Further, it provides such a system wherein such at least one enclosure comprises at least one aperture structured and arranged to permit operating power connection between such at least one rotary movement generator and external power source. Even further, it provides such a system wherein such at least one enclosure comprises at least one securable briefcase structured and arranged to provide briefcase securing of such at least one enclosure.

Moreover, it provides such a system wherein such at least one hand-carrier comprises at least one handle. Additionally, it provides such a system further comprising at least one mounting member structured and arranged to mount, in at least one operational alignment, such at least one positioner and such at least one magnetizer to such at least one enclosure. Also, it provides such a system wherein such at least one positioner comprises at least one user-adjustable planar sheet feeder structured and arranged to user-adjustably feed the at least one planar sheet into such at least one magnetizer. In addition, it provides such a system wherein such at least one adjustable planar sheet feeder accepts a sheet width of less than about 13 inches. And, it provides such a system wherein such at least one adjustable planar sheet feeder collapses to allow containment in such at least one enclosure when stored.

In accordance with another preferred embodiment hereof, this invention provides a system, related to magnetization of at least one substantially planar sheet of substantially flexible magnetizable material, such system comprising: at least one first magnetic field source structured and arranged to produce at least one first magnetic field; at least one second magnetic field source structured and arranged to produce at least one second magnetic field; and at least one geometric positioner structured and arranged to geometrically position such at least one first magnetic field source and such at least one second magnetic field source to generate at least one first magnetic-flux field region resulting from at least one magnetic-field interaction between such at least one first magnetic field and such at least one second magnetic field; wherein such at least one first magnetic-flux field region is situate substantially between such at least one first magnetic field source and such at least one second magnetic field source; wherein such at least one geometric positioner comprises at least one passage structured and arranged to allow moving passage of the substantially flexible magnetizable material through such at least one first magnetic-flux field region; at least one enclosure structured and arranged to enclose such at least one first magnetic field source, such at least one second magnetic field source, and such at least one geometric positioner; and at least one hand-carrier structured and arranged to permit hand-carrying of such at least one enclosure.

Further, it provides such a system wherein: such at least one second magnetic field source is structured and arranged to make physical contact with the at least one substantially planar sheet of substantially flexible magnetizable material during passage through such at least one first magnetic-flux field region; and such at least one first magnetic field source is structured and arranged to avoid physical contact with the at least one substantially planar sheet of substantially flexible magnetizable material during passage through such at least one first high-flux field region. Even further, it provides such a system wherein: each of such at least one first magnetic field source and such at least one second magnetic field source comprises at least one magnetizer bar comprising at least one longitudinal axis; such at least one magnetizer bar comprises a plurality of discrete field-producing lamination-sets spaced along such at least one longitudinal axis; each discrete field-producing lamination-set of such plurality comprises at least one circular magnetic disk and at least one circular flux-conducting spacer magnetically coupled with such at least one circular magnetic disk; and each such at least one circular magnetic disk and each such at least one circular flux-conducting spacer are coaxial with such at least one longitudinal axis.

Moreover, it provides such a system further comprising at least one axial-holder structured and arranged to axially-hold such at least one magnetizer bar along such at least one longitudinal axis. Additionally, it provides such a system further comprising at least one rotary movement generator structured and arranged to generate rotary movement of such at least one axial-holder and such at least one magnetizer bar. Also, it provides such a system wherein such at least one magnetizer bar is structured and arranged to magnetically couple to the at least one planar sheet, when the at least one planar sheet is in position to pass through at least one magnetic field produced by such at least one magnetic field source, to transfer movement to the at least one planar sheet. In addition, it provides such a system wherein, when the at least one planar sheet is in position and coupled to such at least one magnetizer bar, such at least one magnetizer bar is structured and arranged to rotate to move the at least one planar sheet through such at least one first magnetic-flux field region. And, it provides such a system further comprising at least one planar sheet decoupler structured and arranged to decouple the at least one planar sheet from such at least one magnetizer bar during movement of the at least one planar sheet through such at least one first magnetic-flux field region. Further, it provides such a system wherein such at least one magnetizer bar is structured and arranged to rotate to move the at least one planar sheet through such at least one first magnetic-flux field region at a rate from about 10 feet per minute to about 50 feet per minute. Even further, it provides such a system wherein such at least one magnetizer bar rotates to move the at least one planar sheet through such at least one first magnetic-flux field region at a rate of at about 15 feet/min.

Even further, it provides such a system wherein such at least one magnetizer bar comprises at least one magnetizing portion comprising from about 10 to about 20 laminations per inch. Even further, it provides such a system wherein such at least one magnetizing portion comprises exactly 16 laminations per inch. Even further, it provides such a system wherein such at least one magnetizing portion comprises a magnetic field of about 4000 Gauss to about 5000 Gauss. Even further, it provides such a system wherein such at least one sheet decoupler comprises at least one planar rigid decoupler plate. Even further, it provides such a system wherein such at least one planar rigid decoupler plate comprises a plurality of

apertures structured and arranged to permit protrusion of at least one portion of such at least one magnetizer bar to assist movement of the at least one planar sheet. Even further, it provides such a system wherein such at least one planar rigid decoupler plate mounts to such at least one enclosure.

Even further, it provides such a system wherein such at least one planar rigid decoupler plate divides such at least one enclosure into: at least one operation-isolated-region structured and arranged to assist protection of such at least one magnetizer and such at least one rotary movement generator from external interaction, during operation of such at least one magnetizer; and at least one operation-accessible-region structured and arranged to permit user access during operation of such at least one magnetizer. Even further, it provides such a system further comprising at least one user-adjustable planar sheet feeder structured and arranged to user-adjustably feed the at least one planar sheet through such at least one first magnetic-flux field region. Even further, it provides such a system wherein such at least one adjustable planar sheet feeder accepts a sheet width of less than about 13 inches. Even further, it provides such a system wherein such at least one adjustable planar sheet feeder collapses to allow containment in such at least one enclosure when stored. Even further, it provides such a system further comprising at least one magnetic field source aligner structured and arranged to align such at least one first magnetic field source above the movement track and such at least one second magnetic field source below the movement track in such manner as to maximize such at least one magnetic-flux field region crossing the movement track. Even further, it provides such a system each such at least one first magnetic field source is encased to provide at least one smooth surface. Even further, it provides such a system wherein the encasing material allows maximum transmission of magnetic field. Even further, it provides such a system wherein the encasing material comprises brass.

In accordance with another preferred embodiment hereof, this invention provides a briefcase system comprising: at least one briefcase; wherein such at least one briefcase comprises at least one aperture providing access to an interior of such at least one briefcase even when such at least one briefcase is closed. In accordance with a preferred embodiment hereof, this invention provides, each and every novel feature, element, combination, step and/or method disclosed or suggested by this patent application.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 shows a perspective view, illustrating a preferred portable magnetizer system in at least one preferred operable configuration, according to a preferred embodiment of the present invention.

FIG. 2 shows a side view, illustrating a preferred portable magnetizer being carried by a user, according to the preferred embodiment of FIG. 1.

FIG. 3 shows a partial cross-sectional view through the section 3-3 of FIG. 1, illustrating a flexible magnetizable sheet in transit adjacent to a magnetic roller, according to the preferred embodiment of FIG. 1.

FIG. 4 shows a perspective view, illustrating a briefcase enclosure in an open position with loose items and a feed tray secured therein, according to the preferred embodiment of FIG. 3.

FIG. 5 shows a perspective view illustrating such briefcase enclosure in a stowed configuration, according to the preferred embodiment of FIG. 4.

FIG. 6 shows a top view, illustrating at least one magnetizer array with array mounts, according to the preferred embodiment of FIG. 1.

FIG. 7A shows an enlarged top view, illustrating a preferred magnetic stack, according to a preferred embodiment of the present invention. 5

FIG. 7B shows a sectional view through the section 7B-7B of FIG. 7A, illustrating a 12-PPI stack set on a shaft.

FIG. 8A shows an enlarged top view, illustrating an alternately preferred magnetic stack, according to a preferred embodiment of the present invention. 10

FIG. 8B shows a sectional view through the section 8B-8B of FIG. 8A, illustrating a 16-PPI stack set on a shaft.

FIG. 9 shows a sectional view through the section 9-9 of FIG. 6, illustrating a stripper plate with a small-diameter washer, shaft, and a stabilizer bar. 15

FIG. 10 shows a sectional view through the section 10-10 of FIG. 6, illustrating at least one array mount.

FIG. 11 shows an isometric exploded view, illustrating at least one magnetizer array assembly, according to the preferred embodiment of FIG. 10. 20

FIG. 12 shows a top view, illustrating such at least one magnetizer array attached to such panel, according to the preferred embodiment of FIG. 11.

FIG. 13 shows a partial sectional view through the section 13-13 of FIG. 12, illustrating such at least one array mount attachment to such panel, according to the preferred embodiment of FIG. 12. 25

FIG. 14 shows an isometric view, illustrating the feed tray mounted to such panel, according to the preferred embodiment of FIG. 13. 30

FIG. 15 shows an enlarged partial cross-section through the section 15-15 of FIG. 14, illustrating at least one hinge attaching feed tray to such panel.

FIG. 16 shows a side exploded elevation view, illustrating at least one tray mount, according to the preferred embodiment of FIG. 15. 35

FIG. 17 shows a side view of the magnetizer, illustrating the feed tray and tray mounts deployed to an operable position, according to the preferred embodiment of FIG. 16. 40

FIG. 18 shows partial underside view of such panel, illustrating at least one motor and chain drive, according to the preferred embodiment of FIG. 17.

FIG. 19 shows the sectional view 19-19 of FIG. 18, illustrating such motor and chain drive. 45

FIG. 20 shows a partial-exploded perspective view illustrating at least one high-energy portable magnetizer according to an alternately preferred embodiment of the present invention.

FIG. 21 shows a diagrammatic side view, illustrating at least one feed path through such at least one high-energy portable magnetizer, according to the preferred embodiment of FIG. 20. 50

FIG. 22 shows an isometric exploded view, illustrating at least one high-energy magnetizer array assembly, according to the preferred embodiment of FIG. 21. 55

FIG. 23 shows an isometric exploded view, illustrating at least one upper magnetizer array subassembly, according to the preferred embodiment of FIG. 22.

FIG. 24 shows a top view of such at least one high-energy magnetizer array assembly, illustrating at least one rotational drive subassembly, according to the preferred embodiment of FIG. 23. 60

FIG. 25 shows a front view of such at least one high-energy magnetizer array assembly, illustrating such at least one rotational drive subassembly, according to the preferred embodiment of FIG. 23. 65

FIG. 26 shows the sectional view 26-26 of FIG. 24, illustrating such at least one rotational drive subassembly.

DETAILED DESCRIPTION OF THE BEST MODES AND PREFERRED EMBODIMENTS OF THE INVENTION

Magnetizable sheets preferably comprise a printable surface that allows them to be printed on by standard printers. These magnetizable sheets can cause problems with printers when they are run through the printer after magnetization, since a magnetic field may interfere with the operability of the printer. One solution to this problem is to print on the printable side of the magnetizable sheets prior to magnetization. The sheets would then not interfere with printer function, and after printing, the sheet may then be run through a magnetizer.

FIG. 1 shows a perspective view, illustrating a preferred portable magnetizer system 100 in at least one preferred operable configuration 109. Portable magnetizer system 100 preferably provides a solution to the stated problem of portable onsite magnetizing. Portable magnetizer system 100 preferably comprises at least one portable magnetizer 105. Portable magnetizer 105 preferably comprises at least one briefcase enclosure 108. Upon reading the teachings of this specification, those skilled in the art will now appreciate that, under appropriate circumstances, considering such issues as cost, future technologies, etc., other enclosures, such as, for example, box enclosures, top carry enclosures, soft case enclosures, etc., may suffice.

Portable magnetizer 105 preferably comprises at least one magnetizer 101 housed inside briefcase enclosure 108 (at least embodying herein enclosure means for enclosing said magnetizer means and said positioner means; and at least embodying herein at least one enclosure structured and arranged to enclose said at least one magnetizer and said at least one positioning geometry), as shown. Magnetizer 101 (at least embodying herein magnetizer means for providing at least one magnetic field source; and at least embodying herein at least one magnetizer structured and arranged to provide at least one magnetic field source) preferably comprises at least one magnetic roller 133 and at least one feed tray 112 preferably mounted to (see FIG. 10 through FIG. 17) at least one panel 106. Magnetic roller 133 preferably comprises at least one magnetizer array 104. Upon reading the teachings of this specification, those skilled in the art will now appreciate that, under appropriate circumstances, considering such issues as cost, future technologies, etc., other magnetizing arrangements, such as, for example, rollers with separate magnetizer arrays, magnetic bars arrays, dual magnetic field sources, etc., may suffice.

In operable configuration 109, briefcase enclosure 108 is preferably in an open position, as shown. Feed tray 112 is preferably in preferred angled position 114, as shown. At least one power cord 118 (at least embodying herein at least one power cord structured and arranged to assist power transfer from at least one power source to said at least one rotary movement generator) is preferably plugged into at least one power cord receptacle 122 within portable magnetizer 105 and at least one wall outlet 124, as shown. Upon reading the teachings of this specification, those skilled in the art will now appreciate that, under appropriate circumstances, considering such issues as site location, cost, future technologies, etc., other power sources, such as, for example, solar power cells, batteries, vehicle electrical circuits, etc., may suffice.

FIG. 2 shows a side view illustrating portable magnetizer 105 being carried by user 129. Portable magnetizer 105 is preferably closed and preferably placed in at least one stowed

configuration **127** when not in use, as shown best in FIG. **4** and FIG. **5**. Preferred stowed configuration **127** of portable magnetizer **105** preferably assists user **129** to carry portable magnetizer **105**, as shown. Portable magnetizer **105** preferably weighs about 25 lbs.

With reference to FIG. **1**, as discussed, portable magnetizer **105** is preferably deployed by user **129** to operable configuration **109** prior to use. First, briefcase enclosure **108** is preferably opened, as shown in FIG. **1**. Then, feed tray **112** preferably is deployed to angled position **114** using at least one tray mount **128**, as discussed in detail with reference to FIGS. **14-17**. After plugging in power cord **118**, at least one power switch **131** is then preferably turned to "on" position **132**. Turning power switch **131** to "on" position **132** preferably activates rotation of magnetic roller **133**. Portable magnetizer **105** preferably utilizes standard electrical power (preferably about 115 volts alternating current preferably with about 1.6 amperes of current load).

FIG. **3** shows a partial cross-sectional view through section **3-3** of FIG. **1**, illustrating at least one flexible magnetizable sheet **141** in transit adjacent to magnetic roller **133**, according to the preferred embodiment of FIG. **1**. Flexible magnetizable sheet **141** is preferably loaded into feed tray **112**. Flexible magnetizable sheet **141** is preferably loaded with printed side **135** facing away from feed tray **112** (at least embodying herein positioning geometry means for permitting positioning the at least one substantially planar sheet in at least one magnetizing interaction relationship with said at least one magnetizer means; and at least embodying herein at least one positioning geometry structured and arranged to permit positioning the at least one substantially planar sheet in at least one magnetizing interaction relationship with said at least one magnetizer). Magnetic roller **133** preferably pulls, preferably through rotation and magnetic coupling, flexible magnetizable sheet **141** from feed tray **112** (this arrangement at least herein embodying wherein said at least one magnetizer bar magnetically couples to the at least one substantially planar sheet to transfer movement to the at least one substantially planar sheet). Magnetic roller **133** then preferably drives, preferably through rotation and magnetic coupling, flexible magnetizable sheet **141** along at least one feed path **143**, as shown. Magnetic roller **133** preferably runs between about 10 feet/min and about 50 feet/min, preferably at about 15 feet/min (this arrangement at least herein embodying wherein said at least one magnetizer bar rotates to move the at least one substantially planar sheet through said at least one magnetizer at a rate from about 10 feet/min to about 50 feet/min; and this arrangement at least herein embodying wherein said at least one magnetizer bar rotates to move the at least one substantially planar sheet through said at least one magnetizer at a rate of at about 15 feet/min).

Magnetizer array **104** comprises a length of about 13 inches, preferably allowing portable magnetizer **105** to magnetize flexible magnetizable sheet **141** comprising less than about 13 inches in width (this arrangement at least herein embodying wherein said at least one adjustable planar sheet feeder accepts a width of the at least one substantially planar sheet of less than about 13 inches). Upon reading the teachings of this specification, those skilled in the art will now appreciate that, under appropriate circumstances, considering such issues as cost, future technology, etc., other magnetizer array lengths, such as, for example, 24 inches, 10 inches, 10 cm, etc., may suffice.

Magnetizer array **104** preferably comprises at least one stripper plate **136**. Stripper plates **136** in magnetizer array **104** preferably guide flexible magnetizable sheet **141** over the magnetic roller **133**. Stripper plates **136** are preferably shaped

to allow flexible magnetizable sheet **141** to be preferably guided on entry side **147** and off exit side **148** of magnetic roller **133**.

Magnetic roller **133** preferably couples with and preferably moves flexible magnetizable sheet **141** over magnetizer array **104** preferably by rotation and magnetic coupling as previously stated. At least one motor **152** and at least one chain drive **156** preferably provide rotary movement of magnetic roller **133**. In the process of passing over magnetizer array **104**, flexible magnetizable sheet **141** is preferably magnetized by at least one magnetic field **154** from magnetic roller **133**. (Magnetic roller **133** components will be discussed in more detail in FIG. **6** through FIG. **9**.) Flexible magnetizable sheet **141** is preferably moved along feed path **143** to exit side **148** of magnetic roller **133**, preferably guided by stripper plates **136**. Stripper plates **136** (at least embodying herein at least one sheet decoupler structured and arranged to decouple the at least one substantially planar sheet from said at least one magnetizer bar during movement of the at least one substantially planar sheet through said at least one magnetizer) preferably de-couple flexible magnetizable sheet **141** from magnetic roller **133**, during operation. Flexible magnetizable sheet **141** preferably moves from exit side **148** of magnetic roller **133** to panel **106**. Flexible magnetizable sheet **141** then preferably moves off at least one edge **160** of briefcase enclosure **108**.

Upon reading this specification, those with ordinary skill in the art will now appreciate that, under appropriate circumstances, considering such issues as design preference, user preferences, marketing preferences, cost, structural requirements, available materials, technological advances, etc., other magnetic field generator arrangements such as, for example, solenoids, Helmholtz coils, bar magnets, iron core solenoids, electromagnets, or other magnetic generator technologies, etc., may suffice.

FIG. **4** shows a perspective view illustrating briefcase enclosure **108** in open position **110** with loose items **221** and feed tray **112** secured therein. Briefcase enclosure **108** preferably comprises at least one Pelican model 1500 case **107**. Pelican model 1500 case **107** is available from Pelican Products, Inc., located at 23215 Early Avenue, Torrance, Calif. 90505 (Tel. 310-326-4700) or from www.pelican.com on the Internet. Briefcase enclosure **108** preferably comprises at least one seal **181**, preferably at least one hinge **182**, preferably at least one latch **183**, preferably at least one padlock hole **184** and preferably at least one handle **186** (at least embodying herein hand-carrier means for permitting hand carrying of said enclosure means; and at least embodying herein at least one hand-carrier element structured and arranged to permit hand carrying of said at least one enclosure).

Seal **181** preferably comprises at least one O-ring seal, preferably following along the perimeter of briefcase enclosure **108**, as shown. Latch **183** preferably comprises at least one double throw latch, as shown. Padlock hole **184** preferably comprises at least one reinforced padlock hole, preferably at least one stainless steel reinforced padlock hole, as shown. Handle **186** preferably comprises at least one molded handle. Handle **186** preferably comprises at least one rubber padding **190**.

Briefcase enclosure **108** preferably comprises at least one continuous panel flange **187** with pre-drilled holes **188** to preferably receive and mount panel **106**. Panel **106**, which preferably mounts to panel flange **187**, preferably comprises magnetizer array **104**, feed tray **112**, and motor **152**. Briefcase enclosure **108** also preferably comprises accessory openings **130** (at least herein embodying wherein said at least one

briefcase comprises at least one aperture providing access to an interior of said at least one briefcase even when said at least one briefcase is closed; and at least herein embodying wherein said at least one enclosure comprises at least one aperture structured and arranged to permit operating power connection between said at least one rotary movement generator and external power source) to receive power switch **131**, power cord receptacle **122** and at least one fuse **177**.

Briefcase enclosure **108** preferably serves several functions for portable magnetizer **105**. Briefcase enclosure **108** preferably houses magnetizer **101**, preferably keeping motor **152** and chain drive **156** contained (as well as guarded for safety during operation), as shown (see also FIG. 3). Panel **106** and at least one lower portion **173** of briefcase enclosure **108** preferably make up at least one housing **164** (at least embodying herein at least one operation-isolated-region structured and arranged to assist protection of said at least one magnetizer and said at least one rotary movement generator from external interaction, during operation of said at least one magnetizer). Motor **152** and chain drive **156** are preferably contained while in operable configuration **109** (see FIG. 1) or in stowed configuration **127** (see FIG. 5).

Another function of the briefcase enclosure **108** is to preferably secure loose items **221**. Loose items **221** are items within portable magnetizer system **100**, which when not secured, could damage magnetizer **101** during movement or relocation of portable magnetizer **105**. Loose items **221** preferably include tray mounts **128** and power cord **118**. Loose items **221** are preferably secured by at least one user **129** configuring briefcase enclosure **108** to stowed configuration **127** (see FIG. 5). In stowed configuration **127**; tray mounts **128**, power cord **118**, and feed tray **112** are preferably secured (this arrangement at least herein embodying wherein said at least one power cord may be contained in said at least one enclosure when stored). Feed tray **112**, preferably collapses to position shown in FIG. 4 when being stored or transported (this arrangement at least herein embodying wherein said at least one adjustable planar sheet feeder collapses to allow containment in said at least one enclosure when stored). Briefcase enclosure **108** preferably comprises at least one storage mount **214** for tray mounts **128** and at least one storage mount **215** for power cord **118**. Additionally, feed tray **112** is preferably secured with at least one lock down mechanism **218** to preferably prevent movement of feed tray **112** while in stowed configuration **127**. Securing previously mentioned loose items **221** preferably prevents damage to magnetizer **101**. Upon reading the teachings of this specification, those skilled in the art will now appreciate that, under appropriate circumstances, considering such issues as cost, future technology, etc., other loose item securing devices, such as, for example, cord retractors, collapsible tray mounts, spring locks, molded forms, molded foams, etc., may suffice.

FIG. 5 shows a perspective view illustrating briefcase enclosure **108** in stowed configuration **127**. Another function of briefcase enclosure **108** is to preferably make portable magnetizer **105** portable, secure, and easily storable. Portable magnetizer **105** becomes portable, secure, and easily storable when transitioned to stowed configuration **127**, as shown. When user is ready to transition briefcase enclosure **108** to stowed configuration **127**, loose items **221** are secured as previously mentioned (see FIG. 4). Briefcase lid **174** is then preferably closed and latched with latches **183**. At least one padlock **185** are then preferably inserted into padlock hole **184** and locked. User **129** preferably carries briefcase enclosure **108** by preferably grasping handle **186** as shown in FIG. 2. This arrangement at least herein embodies wherein said enclosure means comprises securable briefcase means for

providing briefcase securing of said enclosure means; and this arrangement at least herein embodies wherein said at least one enclosure comprises at least one securable briefcase structured and arranged to provide briefcase securing of said at least one enclosure.

Stowed configuration **127** reduces the size of the portable magnetizer **105**, making it smaller for storage. Stowed configuration **127** of briefcase enclosure **108** also preferably allows for simplified handling and moving of portable magnetizer **105** by configuring the portable magnetizer **105** into a manageable size that can be easily held by handle **186** (at least herein embodying wherein said at least one hand-carrier element comprises at least one handle). In addition, padlock **185** adds security to portable magnetizer **105** by controlling access to briefcase enclosure **108**.

Upon reading this specification, those with ordinary skill in the art will now appreciate that, under appropriate circumstances, considering such issues as design preference, user preferences, marketing preferences, cost, structural requirements, available materials, technological advances, etc., other enclosure arrangements such as, for example, custom case designs, OEM preconfigured briefcases, or cases made of alternate materials (such as steel, aluminum, wood, or wireframe), etc., may suffice.

FIG. 6 shows a top view illustrating magnetizer array **104** with array mounts **248**. Magnetizer **101**, as shown (see FIG. 1) preferably comprises magnetizer array **104**, as shown (see FIG. 6). Magnetizer array **104** preferably comprises a magnetic roller **133** as previously mentioned. Magnetic roller **133** is preferably 1" in diameter. Magnetic roller **133** preferably comprises at least one magnetic stack **239**, preferably a plurality of magnetic stacks **239**.

Magnetic roller **133** preferably comprises at least one shaft **231**. Shaft **231** preferably rotates magnetic stacks **239** of magnetic roller **133**, during operation. Shaft **231** and thereby magnetic stacks **239** of magnetic roller **133** are preferably rotated by motor **152** (at least embodying herein rotary movement generator means for generating rotary movement of said axial-holder means; and at least embodying herein at least one rotary movement generator structured and arranged to generate rotary movement of said at least one axial-holder and said at least one magnetizer bar, and at least herein embodying wherein said at least one rotary movement generator comprises at least one motor) and chain drive **156**, during operation. Rotation of magnetic roller **133** preferably moves flexible magnetizable sheet **141** over magnetizer array **104** as previously stated. Magnetic field **154** of magnetic roller **133** preferably induces a magnetic field (and magnetic alignment) in flexible magnetizable sheet **141** as it passes over the magnetic roller **133**. Flexible magnetic sheet **141** preferably retains at least one portion of this magnetic alignment and thereby becomes magnetized.

Stripper plates **136** are preferably spaced about 1 inch apart along shaft **231** between magnetic stacks **239** (at least herein embodying wherein said at least one magnetizer bar comprises a set of discrete field-producing laminations spaced substantially along said at least one longitudinal axis; and this arrangement at least herein embodying wherein said at least one sheet decoupler comprises a plurality of decoupler elements; and this arrangement at least herein embodying wherein said plurality of decoupler elements are spaced about every inch along said at least one longitudinal axis), as shown. Magnetizer array **104** preferably comprises at least one stabilizer bar **245** that runs between array mounts **248**. Stabilizer bar **245** preferably stabilizes stripper plates **136**, and preferably prevents rotation of stripper plates **136**, during operation.

15

Further, stabilizer bar **245** preferably positions stripper plates **136** to optimize operation of magnetizer **101**.

FIG. 7A shows an enlarged top view, illustrating a preferred magnetic stack, according to a preferred embodiment of the present invention. Magnetic stack **239** preferably comprises disk magnets **225** (at least herein embodying wherein said at least one magnetic field source comprises at least one permanent magnet) as shown, alternately interspersed with steel washers **227** along shaft **231** (at least embodying herein axial-holder means for axially-holding said magnetizer means along a single longitudinal axis; and at least embodying herein at least one axial-holder structured and arranged to axially-hold said at least one magnetizer bar along said at least one longitudinal axis; and this arrangement at least herein embodying wherein said at least one magnetic field source comprises at least one magnetizer bar comprising at least one longitudinal axis; and this arrangement at least herein embodying wherein each discrete field-producing lamination of said set comprises at least one substantially circular magnetic disk magnetically coupled with at least one substantially circular flux-conducting spacer). Disk magnets **225** are preferably arranged with all like poles facing the same direction so as to alternate positive poles **229** and negative poles **230**, along magnetic stack **239**. Upon reading the teachings of this specification, those skilled in the art will now appreciate that, under appropriate circumstances, considering such issues as cost, future technologies, etc., other magnet arrangements, such as, for example, segmented disk magnets, mono-pole magnets, intrinsically layered magnets, etc., may suffice.

Magnetic stack **239** preferably comprises a diameter of about 1 inch. Magnetic stack **239** preferably comprises a length of about 1 inch. Upon reading the teachings of this specification, those skilled in the art will now appreciate that, under appropriate circumstances, considering such issues as cost, configuration, future technologies, etc., other dimensions, such as, for example, 2 inches, 1 foot, 5 cm, etc., may suffice.

Magnetic stack **239** preferably comprises a 12-PPI (poles per inch) stack **235** (herein sometimes referred to as PPI stack). 12-PPI stack **235** preferably is set on shaft **231**. 12-PPI stack **235** preferably comprises 12 disk magnets **225** and preferably 12 steel washers **227** per inch (this arrangement at least herein embodying wherein said at least one magnetizer bar comprises exactly 12 of said discrete field-producing laminations per inch). 12-PPI stack **235** preferably comprises a magnetic field, preferably between about 5000 gauss and 6000 gauss (at least herein embodying wherein said at least one magnetizer bar comprises a magnetic field from about 5000 Gauss to about 6000 Gauss).

FIG. 7B shows a sectional view through the section 7B-7B of FIG. 7A, illustrating 12-PPI stack **235** set on shaft **231**. Disk magnets **225** and steel washers **227**, preferably have at least one center hole **228** permitting placement over shaft **231**.

FIG. 8A shows an enlarged top view, illustrating an alternately preferred embodiment of magnetic stack **239**, according to a preferred embodiment of the present invention. FIG. 8B shows a sectional view through the section 8B-8B of FIG. 8A illustrating a 16-PPI stack **237** set on shaft **231**. Alternately, magnetic stack **239** preferably comprises 16-PPI stack **237**. 16-PPI stack **237** preferably comprises 16 disk magnets **225** and preferably 16 steel washers **227** per inch (this arrangement at least herein embodying wherein said at least one magnetizer bar comprises exactly 16 of said discrete field-producing laminations per inch). 16-PPI stack **237** preferably comprises a magnetic field, preferably between about

16

4000 Gauss and about 5000 Gauss (at least herein embodying wherein said at least one magnetizer bar comprises a magnetic field from about 4000 Gauss to about 5000 Gauss).

FIG. 9 shows a sectional view through section 9-9 of FIG. 6, illustrating stripper plate **136** with at least one small-diameter washer **241**, shaft **231**, and at least one stabilizer bar **245**. Stripper plates **136** preferably comprise a center hole **240** to allow for at least one small-diameter washer **241**. Small-diameter washer **241** preferably fits on shaft **231**, preferably inside center hole **240** of stripper plates **136**. Small-diameter washer **241**, preferably made of steel, preferably provides spacing clearance between rotating portions of magnetic roller **133** and stripper plates **136**. Small-diameter washer **241** preferably spaces the stripper plate from shaft **231**, as well as preferably isolates stripper plates **136** from shaft **231** rotation. In addition, small-diameter washer **241** preferably is slightly thicker than stripper plate **136**, preferably to space stripper plate **136** away from magnetic stack **239** on either side. Stripper plates **136** preferably do not rotate during operation of magnetizer **101**.

Stabilizer bar **245** preferably runs through at least one stabilizer-bar hole **243** in stripper plates **136**. At least one stabilizer bar **245** preferably connects to array mount **248** at each end of magnetizer array **104** (see FIG. 6), preferably at least one stabilizer-bar mounting hole **253** (see FIG. 10).

Stabilizer bar **245**, along with small-diameter washer **241**, preferably prevents stripper plates **136** from rotating. Stripper plates **136** are preferably held by stabilizer bar **245** to counter rotation of shaft **231**, and magnetic roller **133**, during operation of magnetizer **101**. Stripper plates **136** are preferably stabilized by stabilizer bar **245** allowing stripper plates **136** to preferably guide flexible magnetizable sheet **141** over the magnetic roller **133** as previously mentioned in FIG. 3.

Endplates **257** are preferably mounted on both sides of shaft **231** to preferably hold the magnetic stacks **239**, stripper plates **136**, and small-diameter washers **241**, on shaft **231**, as shown in FIG. 6. Endplates **257** preferably comprise at least one endplate locking-screw **260**. Endplate locking-screw **260** preferably secures endplates **257** to shaft **231**. Endplates **257** preferably apply pressure to transfer rotation of shaft **231** to magnetic stacks **239**, and small-diameter washers **241**. Upon reading the teachings of this specification, those skilled in the art will now appreciate that, under appropriate circumstances, considering such issues as cost, future technologies, etc., other rotation transfer devices, such as, for example, key shafts, locking screws, adhesives, etc., may suffice.

At least one gear-drive endplate **259** is preferably located on shaft **231** at motor side **263** of magnetizer array **104**. Gear-drive endplate **259** preferably provides connection of shaft **231** to chain drive **156** and motor **152**, as discussed in detail with reference to FIGS. 18-19. At least one opposed endplate **258** is preferably located on shaft **231** at non-motor side **264** of magnetizer array **104**.

Upon reading this specification, those with ordinary skill in the art will now appreciate that, under appropriate circumstances, considering such issues as design preference, user preferences, marketing preferences, cost, structural requirements, available materials, technological advances, etc., other magnetizer holding arrangements such as, for example, non circular shafts, cable shafts, or non-shaft magnetizer, etc., may suffice.

FIG. 10 shows a sectional view through the section 10-10 of FIG. 6, illustrating array mount **248**. Array mount **248** preferably comprises at least one shaft-hole **251**. At least one low-friction bearing **252** is preferably set into shaft-hole **251** by tight friction fit. Shaft **231**, with magnetizer array **104**, is preferably set into low-friction bearing **252**. Upon reading the

teachings of this specification, those skilled in the art will now appreciate that, under appropriate circumstances, considering such issues as cost, future technology, etc., other rotating shaft mountings, such as, for example, rotating end-plates, coaxial bearings, lubricated joints, etc., may suffice.

Array mount **248** also preferably comprise threaded holes **266**. Threaded holes **266** preferably receive array mount bolts **267** as shown best in FIGS. **11-13** to secure array mount **248** to panel **106**. Upon reading the teachings of this specification, those skilled in the art will now appreciate that, under appropriate circumstances, considering such issues as cost, future technology, materials, etc., other fasteners, such as, for example, rivets, pins, adhesives, etc., may suffice.

Array mount **248** preferably comprises stabilizer-bar mounting hole **253**. Stabilizer-bar mounting hole **253** preferably accepts end of stabilizer bar **245**. Upon reading the teachings of this specification, those skilled in the art will now appreciate that, under appropriate circumstances, considering such issues as cost, future technology, materials, etc., other stabilizer bar mountings, such as, for example, end bolts, adhesives, brackets, etc., may suffice.

With reference to FIG. **10**, array mount **248** is preferably set on shaft **231** of magnetizer array **104**. Low friction bearing **252** preferably allow magnetic roller **133** to rotate freely between array mounts **248**.

FIG. **11** shows an isometric exploded view, illustrating at least one magnetizer array assembly **205**, according to the preferred embodiment of FIG. **10**. Magnetizer array assembly **205** preferably comprises magnetizer array **104** preferably attaching to underside **270** of panel **106** with array mount **248**. Array mounts **248**, along with magnetizer array **104**, preferably are joined to underside **270** of panel **106**. Array mounts **248** are preferably bolted to panel **106** (at least embodying herein at least one mounting member structured and arranged to mount, in at least one operational alignment, said at least one positioner and said at least one magnetizer to said at least one enclosure) with array mount bolts **267**.

FIG. **12** shows a top view, illustrating magnetizer array **104** attached to panel **106**, according to the preferred embodiment of FIG. **11**. FIG. **13** shows a partial sectional view through the section **13-13** of FIG. **12**, illustrating array mount **248** attachment to panel **106**, according to the preferred embodiment of FIG. **12**.

Array mounts **248** preferably hold magnetizer array **104** to panel **106**. Mounting magnetizer array **104** to panel **106** preferably stabilizes gear-drive endplate **259**. As previously stated, gear drive-endplate **259** is preferably driven by chain drive **156** and motor **152** (see FIG. **19**) to rotate the magnetic roller **133**. Array mounts **248** also preferably hold magnetizer array **104** in alignment with feed tray **112**.

Upon reading this specification, those with ordinary skill in the art will now appreciate that, under appropriate circumstances, considering such issues as design preference, user preferences, marketing preferences, cost, structural requirements, available materials, technological advances, etc., other shaft holding arrangements such as, for example, mounting array mounts to top of panel (instead of bottom location of panel as indicated in this specification), array mounts molded in to panel, direct mounting of magnetizer to panel, or mounting magnetizer directly to portable briefcase enclosure, etc., may suffice.

FIG. **14** shows an isometric view, illustrating feed tray **112** mounted to panel **106**, according to the preferred embodiment of FIG. **13**. Feed tray **112** preferably comprises at least one feed-tray panel **291**, which preferably comprises steel. Feed tray **112** further comprises at least one adjustable guide **294**, which also preferably comprises of steel. Upon reading the

teachings of this specification, those skilled in the art will now appreciate that, under appropriate circumstances, considering such issues as cost, future technologies, etc., other materials, such as, for example, wood, plastics, other metals, etc., may suffice.

Adjustable guide **294** is preferably attached to feed-tray panel **291** with counter-sink screws **295** (see FIG. **17**). Adjustable guide **294** is preferably mounted on feed tray **112** in at least one of variable positions **300** to assist feeding flexible magnetizable sheet **141** straight across magnetic roller **133** (this arrangement herein embodying wherein said at least one positioning geometry comprises at least one user-adjustable planar sheet feeder structured and arranged to user-adjustably feed the at least one substantially planar sheet into said at least one magnetizer). User **129** preferably locates adjustable guide **294** as required at one of variable positions **300** on feed tray **112**. User **129** preferably attaches adjustable guide **294** as required.

FIG. **15** shows an enlarged partial cross-section through section **15-15** of FIG. **14**, illustrating at least one hinge attaching feed tray **112** to panel **106**. Feed tray **112** is preferably attached to panel **106** with at least one feed-tray hinge **280**. Feed-tray hinge **280** is preferably fastened to feed tray **112** with counter-sink screws **285**. Feed-tray hinge **280** is also preferably fastened to top **271** of panel **106** with at least one counter-sink screw **288**. Upon reading the teachings of this specification, those skilled in the art will now appreciate that, under appropriate circumstances, considering such issues as cost, future technology, etc., other hinging attachments, such as, for example, piano hinges, pin hinges, flexible joints, etc., may suffice.

FIG. **16** shows a side exploded elevation view, illustrating tray mount **128**, according to the preferred embodiment of FIG. **15**. Tray mount **128** is preferably used to deploy feed tray **112** to angled position **114**. Feed tray **112** preferably comprises tray mount **128**, preferably two tray mounts **128**. Tray mount **128** preferably comprises at least one tray mount base **308** and at least one tray mount top **309**. Tray mount base **308** preferably comprises at least one threaded-hole **313** and at least one threaded-hole **314** to preferably receive at least one counter-sink screw **316** and counter-sink screw **317** respectively, preferably to mount tray mount **128** to panel **106**, as shown in FIG. **17**.

Tray mount top **309** preferably comprises at least one hole **321** and at least one threaded hole **323**. Threaded hole **323** preferably receives at least one counter-sink screw **325** to preferably hold feed tray panel **291** to tray-mount top **309**.

When user is ready to deploy feed tray **112** to angled position **114**, feed tray **112** is preferably positioned to up position **327**, as shown in FIG. **15**. Up position **327** preferably allows mounting of tray mounts **128**. Tray mounts **128** are preferably mounted as previously described. Feed-tray panel **291** is then preferably rotated back to angled position **114**. Feed-tray panel **291** is then preferably secured to tray mounts **128** with counter-sink screw **325** as previously mentioned. Upon reading the teachings of this specification, those skilled in the art will now appreciate that, under appropriate circumstances, considering such issues as cost, future technologies, etc., other angled deployment methods, such as, for example, folding support arms, friction plates, locking hinges, etc., may suffice.

FIG. **17** shows a side view of magnetizer **101** illustrating feed tray **112** and tray mounts **128** deployed to operable configuration **109**, according to the preferred embodiment of FIG. **16**. User preferably deploys feed tray **112** by preferably attaching tray-mount base **308** to top **271** of panel **106**.

19

Counter-sink screw **316** and counter-sink screw **317** preferably enter tray-mount base **308** from underside **270** of panel **106**.

Tray-mount top **309** is preferably attached to tray-mount base **308**. Feed-tray panel **291** is preferably secured to tray-mount top **309** in angled position **114** by counter-sink screw **325**. Feed-tray panel **291** is preferably held by feed-tray hinges **280** and tray mounts **128**. Feed-tray panel **291** deployed to angled position **114** preferably puts feed tray **112** in operable configuration **109**.

Feed tray **112**, secured to tray mounts **128**, preferably positions flexible magnetizable sheet **141** along feed path **143** towards magnetizer array **104**. Flexible magnetizable sheet **141** is preferably positioned against the adjustable guide **294** as it is fed in.

Upon reading this specification, those with ordinary skill in the art will now appreciate that, under appropriate circumstances, considering such issues as design preference, user preferences, marketing preferences, cost, structural requirements, available materials, technological advances, etc., other flexible-magnetic sheet positioner arrangements such as, for example, magnetic sheet hoppers, motorized feed systems, or alternate guides to interface with magnetizer, etc., may suffice.

FIG. **18** shows partial underside view of panel **106** illustrating at least one mechanical power subsystem **276**, according to the preferred embodiment of FIG. **17**. FIG. **19** shows the sectional view **19-19** of FIG. **18**, illustrating mechanical power subsystem **276**.

Panel **106** preferably encloses mechanical power subsystem **276**, and motor electrical connections in lower portion **173** of briefcase enclosure **108**, as shown in FIG. **4**. Panel **106** also preferably allows for easy mounting of magnetizer array **104** and mechanical power subsystem **276**. Panel **106** also preferably provides simplified access to maintain magnetizer **101**. In the event magnetizer **101** requires maintenance or repairing, panel **106** is preferably removed for access to components of magnetizer **101**.

Mechanical power subsystem **276** preferably comprises motor **152** and chain drive **156**. Motor **152** preferably comprises at least one electric motor, preferably at least one McMaster Carr A/C Gear Motor Part #6142K57. McMaster Carr A/C Gear Motor Part #6142K57 is available from McMaster Carr, located at 600 N. County Line Rd. Elmhurst, Ill. 60126-2081 (sales and customer service: 630-833-0300) or visit www.mcmaster.com on internet. Motor **152** also preferably comprises gearbox **347** and also preferably comprises at least one built in motor fan, preferably preventing overheating of motor **152**. Upon reading the teachings of this specification, those skilled in the art will now appreciate that, under appropriate circumstances, considering such issues as cost, future technologies, etc., other motors, such as, for example, pneumatic motors, hydraulic motors, hand-actuated gearboxes, etc., may suffice.

Motor **152** is preferably attached to at least one angle bracket **332** by at least one motor-mount screw **350**. Angle bracket **332** is preferably attached to panel **106** by motor-bracket screws **353**.

Chain drive **156** preferably connects motor **152** to gear-drive endplate **259** on magnetizer array **104**. Chain drive **156** preferably comprises at least one chain **336**, gear-drive endplate **259**, at least one motor-shaft **343**, and at least one motor-gear **344**. Motor **152** preferably connects to at least one gearbox **347**. Gearbox **347** preferably connects to motor shaft **343**. Motor-shaft **343** preferably connects to motor-gear **344**. Chain **336** preferably connects motor-gear **344** to gear-drive endplate **259** on shaft **231**.

20

Upon reading this specification, those with ordinary skill in the art will now appreciate that, under appropriate circumstances, considering such issues as design preference, user preferences, marketing preferences, cost, structural requirements, available materials, technological advances, etc., other rotary movement to shaft transfer arrangements such as, for example, gear transmission systems, belt drive, or direct drive systems, etc., may suffice.

Motor **152** preferably comprises at least one motor-power wire **359**, at least one motor grounding wire **360**, preferably connected to fuse **177**, power cord receptacle **122** and power switch **131** (see FIG. **1**). Fuse **177**, power cord receptacle **122**, and power switch **131**, are preferably attached to briefcase enclosure **108** as best shown in FIG. **1**. Portable magnetizer **105** is preferably fused for safety. Motor **152** is preferably wired to fuse **177**, power cord receptacle **122**, and power switch **131** in conventional electrical configuration.

Power switch **131** preferably activates motor **152**. Motor **152** preferably sends mechanical power to gearbox **347**. Gearbox **347** preferably transfers power to motor-shaft **343** and motor-gear **344**. Motor-gear **344** preferably moves chain **336**. Motor-gear **344** preferably drives gear-drive endplate **259** at about a one-to-one revolution ratio. Rotation of gear-driven endplate **259** preferably drives shaft **231** and magnetic roller **133**.

Upon reading this specification, those with ordinary skill in the art will now appreciate that, under appropriate circumstances, considering such issues as design preference, user preferences, marketing preferences, cost, structural requirements, available materials, technological advances, etc., other rotary movement generator arrangements such as, for example, air motors, air powered motors, appliance motors, pneumatic motors, DC motors, hand crank, solar powered motors, or battery powered motors, etc., may suffice.

FIG. **20** shows a partial-exploded perspective view illustrating at least one high-energy portable magnetizer **400** according to an alternately preferred embodiment of the present invention. While many of the elements of high-energy portable magnetizer **400** are retained from portable magnetizer **105**, in high-energy portable magnetizer **400**, replacing magnetizer array assembly **205** of portable magnetizer **105**, at least one high-energy magnetizer array assembly **405** preferably comprises at least one high-energy magnetizer array **410**. High-energy magnetizer array assembly **405** preferably comprises at least one magnetizer array plate **420**. Magnetizer array plate **420** preferably mounts to lower portion **173** of briefcase enclosure **108**, as shown, preferably with mounting fasteners **425**, preferably mounting screws. Upon reading the teachings of this specification, those skilled in the art will now appreciate that, under appropriate circumstances, considering such issues as future technologies, cost, etc., other mounting fasteners, such as, for example, bolts, snap-fit fasteners, twist-lock fasteners, etc., may suffice.

FIG. **21** shows a diagrammatic side view, illustrating at least one feed path **430** through such at least one high-energy portable magnetizer **400**, according to the preferred embodiment of FIG. **20**. High-energy magnetizer array **410** preferably comprises at least one upper magnetic field source **445** and at least one lower magnetic field source **455**. Lower magnetic field source **455** preferably comprises at least one magnetic roller **450**, as shown. Upper magnetic field source **445** preferably comprises at least one magnetic bar **440**. Magnetic bar **440** preferably comprises at least one outer casing **460** and preferably comprises at least one magnetic roller **465**.

Outer casing **460** preferably comprises at least one magnetically transparent material (material that does not signifi-

cantly attenuate a magnetic field passing through the material), preferably brass. Upon reading the teachings of this specification, those skilled in the art will now appreciate that, under appropriate circumstances, considering such issues as future technologies, cost, etc., other magnetically transparent materials, such as, for example, magnetically transparent plastics, magnetically transparent ceramics, other magnetically transparent metals, etc., may suffice.

Similar to feed path 143, feed tray 112 (see FIG. 20) preferably positions flexible magnetic sheet 141 along feed path 430 toward high-energy magnetizer array 410. Particular to feed path 430, feed path 430 preferably passes between upper magnetic field source 445 and lower magnetic field source 455, as shown. Magnetic roller 450 preferably drives flexible magnetic sheet 141 along feed path 430, similar to magnetic roller 133.

Magnetic bar 440 and magnetic roller 450 are preferably situated with at least one gap 470 between. Gap 470 preferably comprises a distance A preferably of about 1/8 inch. Feed path 430 preferably crosses gap 470, preferably about perpendicular, as shown. Due to the relative positions of magnetic bar 440 and magnetic roller 450, gap 470 preferably comprises at least one region of high magnetic flux.

FIG. 22 shows an isometric exploded view, illustrating high-energy magnetizer array assembly 405, according to the preferred embodiment of FIG. 21. FIG. 23 shows an isometric exploded view, illustrating at least one upper magnetizer array subassembly 510, according to the preferred embodiment of FIG. 22. High-energy magnetizer array assembly 405 preferably comprises upper magnetizer array subassembly 510 and preferably at least one lower magnetizer array subassembly 520. Upper magnetizer array subassembly 510 preferably comprises at least one of magnetic bars 440, preferably at least two of magnetic bars 440. Correspondingly, lower magnetizer array subassembly 520 preferably comprises at least one of magnetic rollers 450, preferably at least two of magnetic rollers 450.

The functional relationship between such at least two of magnetic rollers 450 is representative of the functional relationship between such at least two of magnetic bars 440. For clarity of description, the functional relationship between such at least two of magnetic rollers 450 will be discussed with the understanding that the teachings are equally applicable to the functional relationship between such at least two of magnetic bars 440.

Such at least two of magnetic rollers 450 preferably comprise at least one inner magnetic roller 575 and preferably at least one outer magnetic roller 570. Such at least two of magnetic bars 440 preferably comprise at least one inner magnetic roller 585 and preferably at least one outer magnetic roller 580. Both of such at least two of magnetic rollers 450 and such at least two of magnetic bars 440 preferably extend across substantially the full width of flexible magnetic sheet 141.

Inner magnetic roller 575 comprises at least one rotational shaft 595 preferably oriented substantially perpendicular to the line of direction of feed path 430 (as generally defined by the direction of sheet motion), as shown. Inner magnetic roller 575 preferably comprises a first set of magnetic stacks 239, preferably spaced substantially along the width of rotational shaft 595, as shown. Each magnetic stack 239 preferably comprises an alternating sequence of magnetic plates and flux-conducting plates (as best described in FIG. 8A and FIG. 8B). Each magnetic plate preferably comprises a high-strength permanent magnet and each flux-conducting plate preferably comprises a material exhibiting high permeability when saturated. Both magnetic plates and flux-conducting

plates preferably comprise substantially circular peripheral shapes. Each substantially circular magnetic plate and each substantially circular flux-conducting plate are preferably substantially coaxial with rotational shaft 595, as shown. Thus, the sequential laminations of each magnetic stack 239 form a substantially cylindrical peripheral surface.

Magnetic stacks 239 are preferably mounted coaxially on rotational shaft 595, as shown. Magnetic stacks 239 are preferably separated by a set of spacers 592 that are also preferably mounted coaxially on rotational shaft 595, as shown. Spacers 592 preferably comprise widths generally slightly shorter than those of magnetic stacks 239, as shown. Magnetic stacks 239 preferably each comprise 16-ppi stack 237, as shown in FIG. 8A. Magnetic stacks 239 for high-energy magnetizer array assembly 405 preferably comprise a length of about 1 1/8 inch. Spacers 592 preferably comprise a width of about 1 inch.

The preferred structures and arrangements of inner magnetic roller 585 are substantially identical to those of inner magnetic roller 575, as described above. Preferably, the placements of magnetic stacks 239 along rotational shaft 595 of inner magnetic roller 585 are substantially identical to those of inner magnetic roller 575. This preferably places magnetic stacks 239 of inner magnetic roller 585 in vertical alignment with magnetic stacks 239 of inner magnetic roller 575, as illustrated in FIG. 24. Thus, a plurality of first high-magnetic-flux field regions (six in the depicted embodiment) are preferably generated within inner gap 645 (see FIG. 26) by the preferred vertical stacking of inner magnetic roller 575 over inner magnetic roller 585 and the resulting formation of magnetic flux circuits between inner magnetic roller 575 and inner magnetic roller 585.

The preferred structures and arrangements of outer magnetic roller 570 are substantially similar to those of inner magnetic roller 575, with the exception of the preferred positioning of magnetic stacks 239 along rotational shaft 595, as shown. Note that magnetic stacks 239 of outer magnetic roller 570 are preferably axially offset from magnetic stacks 239 of inner magnetic roller 575. More preferably, magnetic stacks 239 of outer magnetic roller 570 are axially offset a preferred distance substantially equal to the width of one magnetic stack 239, as shown (similarly, magnetic stack 239 of outer magnetic roller 580 are axially offset from magnetic stack 239 of inner magnetic roller 585), preferably centering magnetic stacks 239 of inner magnetic roller 575 on spacers 592 of outer magnetic roller 570. This preferred arrangement produces a plurality of second high-magnetic-flux field regions (seven in the depicted embodiment) within second gap 640, each of such second high-magnetic-flux field regions preferably generated by the preferred vertical stacking of outer magnetic roller 570 over outer magnetic roller 580. Note that the plurality of such second high-magnetic-flux field regions of second gap 640 are preferably axially offset from the plurality of such first high-magnetic-flux field regions of first gap 645.

The preferred axial offsetting of magnetic stacks 239 assures that the full width of flexible magnetic sheet 141 is exposed to at least one of the above-described high-magnetic-flux field regions as it is advanced along feed path 430, as shown. Thus, magnetization of flexible magnetic sheet 141 preferably occurs in parallel strips defined by alternating exposure to the magnetic fields of the inner and outer magnetic rollers. The preferred axial offsetting of the depicted embodiment has been determined to reduce feed-related problems related to the adhering and wrapping of flexible magnetic sheet 141 around the magnetic rollers during operation. Upon reading the teachings of this specification, those of

ordinary skill in the art will now understand that, under appropriate circumstances, considering such issues as intended use, physical characteristics of the flexible magnetic sheet, etc., other magnet arrangements, such as utilizing a continuous array of magnets extending substantially across the sheet width, etc., may suffice.

Magnetizer array plate **420** preferably comprises at least one set of rectangular-shaped apertures **530**, preferably arranged in an offset configuration, as shown, corresponding to layout of magnetic stacks **239** of inner magnetic roller **575** and outer magnetic roller **570**. Rectangular-shaped apertures **530** preferably allow the magnetic stacks **239** of magnetic rollers **450** to project upwardly through magnetizer array plate **420** to contact flexible magnetic sheet **141**, as shown in FIG. 21.

Upper magnetizer array subassembly **510** preferably mounts above magnetizer array plate **420**, preferably outside lower portion **173** of briefcase enclosure **108**. Lower magnetizer array subassembly **520** preferably mounts below magnetizer array plate **420**, preferably inside lower portion **173** of briefcase enclosure **108**. At least one magnetizer array mounting fastener **505** preferably mounts both upper magnetizer array subassembly **510** and lower magnetizer array subassembly **520**, preferably through magnetizer array plate **420**, as shown. Magnetizer array mounting fastener **505** preferably comprises at least one bolt.

Magnetizer array mounting fastener **505** preferably secures at least one lower mounting bracket **425** to upper mounting bracket **540**, preferably sandwiching magnetizer array plate **420**. At least two lower mounting brackets **425** preferably mount lower magnetizer array subassembly **520**, and at least two upper mounting brackets **540** preferably mount upper magnetizer array subassembly **510**, as shown.

Upper magnetizer array subassembly **510** preferably further comprises at least one roller float spring **545**, preferably at least two roller float springs **545**. Roller float springs **545** preferably are positioned at each end of magnetic bars **440**, preferably inside outer casing **460**. Roller float springs **545** preferably allow magnetic roller **465** to shift in a longitudinal direction, preferably to magnetically align with magnetic roller **450** vertically corresponding to magnetic roller **465** (the inner rollers or the outer rollers). Outer casing **460** is preferably free to rotate in upper mounting bracket **540** and magnetic roller is preferably free to rotate or longitudinally slide inside outer casing **460**. Magnetic roller **450** preferably is thereby free to float in order to achieve optimal alignment with magnetic roller **465** optimizing high-magnetic-flux region as described herein. Upon reading the teachings of this specification, those skilled in the art will now appreciate that, under appropriate circumstances, considering such issues as cost, future technologies, etc., other mounting arrangements, such as, for example, vertically shifting outer casings, fine gap adjustments, etc., may suffice.

Lower magnetizer array subassembly **520** preferably connects to motor **152** with at least one rotational drive subassembly **550**. Motor **152** preferably attaches to at least one motor drive shaft **560**, and preferably rotates motor drive shaft **560** during operation. Motor drive shaft **560** preferably attaches to rotational drive subassembly **550** with at least one motor drive belt **565**, as shown. Upon reading the teachings of this specification, those skilled in the art will now appreciate that, under appropriate circumstances, considering such issues as cost, future technologies, etc., other drive train connections, such as, for example, chains, gears, rollers, etc., may suffice.

FIG. 24 shows a top view of high-energy magnetizer array assembly **405**, illustrating rotational drive subassembly **550**,

according to the preferred embodiment of FIG. 23. FIG. 25 shows a front view of high-energy magnetizer array assembly **405**, illustrating rotational drive subassembly **550**, according to the preferred embodiment of FIG. 23. FIG. 26 shows the sectional view 26-26 of FIG. 24, illustrating rotational drive subassembly **550**.

Rotational drive subassembly **550** preferably comprises at least one drive assembly mount **630**, at least one roller drive shaft **620**, and at least one roller drive belt **615**. Rotational drive assembly **550** preferably transfers rotations motion from motor **152** to magnetic roller **450**, preferably in a 1:1 ratio. Upon reading the teachings of this specification, those skilled in the art will now appreciate that, under appropriate circumstances, considering such issues as cost, future technologies, etc., other rotational drive assemblies, such as, for example, gear boxes, direct drives, chain drives, friction roller drives, etc., may suffice.

Drive assembly mount **630** preferably mounts roller drive shaft **620** under magnetic roller **450**, as shown in FIG. 25. Roller drive belt **615** preferably connects roller drive shaft **620** to magnetic roller **450**, preferably transferring rotational motion during operation. Magnetic roller preferably comprises at least one drive spacer **610**, preferably where roller drive belt **615** attaches, preferably comprising at least one of spacers **592** on magnetic roller **450**. Motor drive belt **565** preferably transfers rotational motion from motor drive shaft **560** to roller drive shaft **620**, during operation.

Although applicant has described applicant's preferred embodiments of this invention, it will be understood that the broadest scope of this invention includes modifications such as diverse shapes, sizes, and materials. Such scope is limited only by the below claims as read in connection with the above specification. Further, many other advantages of applicant's invention will be apparent to those skilled in the art from the above descriptions and the below claims.

What is claimed is:

1. A system, relating to enabling magnetization of at least one planar sheet of flexible magnetizable material, said system comprising:

- a) at least one magnetizer structured and arranged to provide at least one magnetic field source;
- b) at least one positioner structured and arranged to permit positioning the at least one planar sheet into at least one magnetizing interaction relationship with said at least one magnetizer;
- c) at least one enclosure structured and arranged to enclose said at least one magnetizer and said at least one positioner; and
- d) at least one hand-carrier structured and arranged to permit hand-carrying, with one hand, of said at least one enclosure;
- e) wherein said at least one positioner is collapsible to permit closure of said at least one enclosure
- f) wherein said at least one magnetizer magnetizes the at least one planar sheet through such at least one magnetizing interaction relationship; and
- g) wherein the at least one planar sheet, when magnetized, is capable of magnetically adhering to at least one magnetically receptive material.

2. The system, according to claim 1, wherein said at least one magnetizer comprises at least one permanent magnet.

3. The system, according to claim 1, wherein:

- a) said at least one magnetizer comprises at least one magnetizer bar comprising at least one longitudinal axis;
- b) said at least one magnetizer bar comprises a plurality of discrete field-producing lamination-sets spaced along said at least one longitudinal axis;

25

- c) each discrete field-producing lamination-set of said plurality comprises at least one circular magnetic disk and at least one circular flux-conducting spacer magnetically coupled with said at least one circular magnetic disk; and
- d) each said at least one circular magnetic disk and each said at least one circular flux-conducting spacer are coaxial with said at least one longitudinal axis.

4. The system, according to claim 3, further comprising at least one axial-holder structured and arranged to axially-hold said at least one magnetizer bar along said at least one longitudinal axis.

5. The system, according to claim 4, further comprising at least one rotary movement generator structured and arranged to generate rotary movement of said at least one axial-holder and said at least one magnetizer bar.

6. The system, according to claim 5, wherein said at least one magnetizer bar is structured and arranged to magnetically couple to the at least one planar sheet, when the at least one planar sheet is in position to pass through at least one magnetic field produced by said at least one magnetic field source, to transfer movement to the at least one planar sheet.

7. The system, according to claim 6, wherein said at least one magnetizer bar is structured and arranged to rotate to move the at least one planar sheet through at least one magnetic field.

8. The system, according to claim 6, further comprising at least one planar sheet decoupler structured and arranged to decouple the at least one planar sheet from said at least one magnetizer bar during movement of the at least one planar sheet through at least one magnetic field.

9. The system, according to claim 8, wherein, when the at least one planar sheet is in position and coupled to said at least one magnetizer bar, said at least one magnetizer bar is structured and arranged to rotate to move the at least one planar sheet through such at least one magnetic field at a rate from about 10 feet per minute to about 50 feet per minute.

10. The system, according to claim 9, wherein, when the at least one planar sheet is in position and coupled to said at least one magnetizer bar, said at least one magnetizer bar is structured and arranged to rotate to move the at least one planar sheet through such at least one magnetic field at a rate of at about 15 feet/min.

11. The system, according to claim 8, wherein said at least one sheet decoupler comprises a plurality of decoupler elements.

12. The system, according to claim 11, wherein each of said plurality of decoupler elements are spaced about every inch along said at least one longitudinal axis.

13. The system, according to claim 8, wherein said at least one sheet decoupler comprises at least one planar rigid decoupler plate.

14. The system, according to claim 13, wherein said at least one planar rigid decoupler plate comprises a plurality of apertures structured and arranged to permit protrusion of at least one portion of said at least one magnetizer bar to assist movement of the at least one planar sheet, when the at least one planar sheet is in position and coupled to said at least one magnetizer bar.

15. The system, according to claim 3, wherein said at least one magnetizer bar comprises at least one magnetizer bar set situate partially above and partially below a movement track of the at least one planar sheet.

16. The system, according to claim 15, wherein said at least one magnetizer bar set comprises at least two magnetizer bar sub-sets, each said magnetizer bar sub-set comprising:

26

- a) at least one magnetic field source above the movement track;
- b) at least one magnetic field source below the movement track; and
- 5 c) at least one flux field situate between said at least one magnetic field source above the movement track and said at least one magnetic field source below the movement track;
- 10 d) wherein said at least one flux field crosses the movement track.

17. The system, according to claim 16, further comprising at least one magnetic field source aligner structured and arranged to align said at least one magnetic field source above the movement track and said at least one magnetic field source below the movement track in such manner as to maximize said at least one flux field crossing the movement track.

18. The system, according to claim 17, wherein each upper magnetic field source is encased to provide at least one smooth surface.

19. The system, according to claim 18, wherein an encasing material allows maximum transmission of magnetic field.

20. The system, according to claim 19, wherein such encasing material comprises brass.

21. The system, according to claim 3, wherein said at least one magnetizer bar comprises at least one magnetizer bar set situate below a movement track of the at least one planar sheet.

22. The system, according to claim 3, wherein each said discrete field-producing lamination-set comprises from about 10 to about 20 laminations per inch.

23. The system, according to claim 22, wherein each said discrete field-producing lamination-set comprises exactly 12 laminations per inch.

24. The system, according to claim 23, wherein each said discrete field-producing lamination-set comprises a magnetic field of about 5000 Gauss to about 6000 Gauss.

25. The system, according to claim 22, wherein each said discrete field-producing lamination-set comprises exactly 16 laminations per inch.

26. The system, according to claim 25, wherein each said discrete field-producing lamination-set comprises a magnetic field of about 4000 Gauss to about 5000 Gauss.

27. The system, according to claim 5, wherein said at least one rotary movement generator comprises at least one motor.

28. The system, according to claim 5, further comprising:
- a) at least one power cord structured and arranged to assist power transfer from at least one external power source to said at least one rotary movement generator;
- 50 b) wherein said at least one power cord may be contained within said at least one enclosure when stored.

29. The system, according to claim 5, further comprising at least one mounting member structured and arranged to mount, in at least one operational alignment, said at least one positioner and said at least one magnetizer to said at least one enclosure.

30. The system, according to claim 29, wherein said at least one mounting member comprises at least one aligning-mounting plate.

31. The system, according to claim 30 wherein said at least one aligning-mounting plate comprises said at least one planar rigid decoupler plate.

32. The system, according to claim 31, wherein said at least one planar rigid decoupler plate comprises a plurality of apertures structured and arranged to permit protrusion of at least one portion of said at least one magnetizer bar to assist movement of the at least one planar sheet.

27

33. The system, according to claim 30, wherein said at least one aligning-mounting plate mounts to said at least one enclosure.

34. The system, according to claim 33, wherein said at least one aligning-mounting plate divides said at least one enclosure into:

- a) at least one operation-isolated-region structured and arranged to assist protection of said at least one magnetizer and said at least one rotary movement generator from external interaction, during operation of said at least one magnetizer; and
- b) at least one operation-accessible-region structured and arranged to permit user access during operation of said at least one magnetizer.

35. The system, according to claim 5, wherein said at least one enclosure comprises at least one aperture structured and arranged to permit operating power connection between said at least one rotary movement generator and external power source.

36. The system, according to claim 1, wherein said at least one enclosure comprises at least one securable briefcase structured and arranged to provide briefcase securing of said at least one enclosure.

37. The system, according to claim 1, wherein said at least one hand-carrier comprises at least one handle.

38. The system, according to claim 1, further comprising at least one mounting member structured and arranged to mount, in at least one operational alignment, said at least one positioner and said at least one magnetizer to said at least one enclosure.

39. The system, according to claim 1, wherein said at least one positioner comprises at least one user-adjustable planar sheet feeder structured and arranged to user-adjustably feed the at least one planar sheet into said at least one magnetizer.

40. The system, according to claim 39, wherein said at least one user-adjustable planar sheet feeder accepts a sheet width of less than about 13 inches.

41. The system, according to claim 39, wherein said at least one user-adjustable planar sheet feeder collapses to allow containment in said at least one enclosure when stored.

42. A system, related to magnetization of at least one substantially planar sheet of substantially flexible magnetizable material, said system comprising:

- a) at least one first magnetic field source structured and arranged to produce at least one first magnetic field;
- b) at least one second magnetic field source structured and arranged to produce at least one second magnetic field; and
- c) at least one geometric positioner structured and arranged to geometrically position said at least one first magnetic field source and said at least one second magnetic field source to generate at least one first magnetic-flux field region resulting from at least one magnetic-field interaction between said at least one first magnetic field and said at least one second magnetic field;
- d) wherein said at least one first magnetic-flux field region is situate substantially between said at least one first magnetic field source and said at least one second magnetic field source;
- e) wherein said at least one geometric positioner comprises at least one passage structured and arranged to allow moving passage of the substantially flexible magnetizable material through said at least one first magnetic-flux field region;

28

f) at least one enclosure structured and arranged to enclose said at least one first magnetic field source, said at least one second magnetic field source, and said at least one geometric positioner; and

g) at least one hand-carrier structured and arranged to permit hand-carrying, with one hand, of said at least one enclosure;

h) wherein said at least one geometric positioner is collapsible to permit closure of said at least one enclosure;

i) wherein said at least one first magnetic field source and said at least one second magnetic field source magnetize the substantially flexible magnetizable material through said at least one first magnetic-flux field region; and

j) wherein the substantially flexible magnetizable material, when magnetized, is capable of magnetically adhering to at least one magnetically receptive material.

43. The system, according to claim 42, wherein:

a) said at least one second magnetic field source is structured and arranged to make physical contact with the at least one substantially planar sheet of substantially flexible magnetizable material during passage through said at least one first magnetic-flux field region; and

b) said at least one first magnetic field source is structured and arranged to avoid physical contact with the at least one substantially planar sheet of substantially flexible magnetizable material during passage through said at least one first high-flux field region.

44. The system, according to claim 43, wherein:

a) each of said at least one first magnetic field source and said at least one second magnetic field source comprises at least one magnetizer bar comprising at least one longitudinal axis;

b) said at least one magnetizer bar comprises a plurality of discrete field-producing lamination-sets spaced along said at least one longitudinal axis;

c) each discrete field-producing lamination-set of said plurality comprises at least one circular magnetic disk and at least one circular flux-conducting spacer magnetically coupled with said at least one circular magnetic disk; and

d) each said at least one circular magnetic disk and each said at least one circular flux-conducting spacer are coaxial with said at least one longitudinal axis.

45. The system, according to claim 44, further comprising at least one axial-holder structured and arranged to axially-hold said at least one magnetizer bar along said at least one longitudinal axis.

46. The system, according to claim 45, further comprising at least one rotary movement generator structured and arranged to generate rotary movement of said at least one axial-holder and said at least one magnetizer bar.

47. The system, according to claim 46, wherein said at least one magnetizer bar is structured and arranged to magnetically couple to the at least one planar sheet, when the at least one planar sheet is in position to pass through at least one magnetic field produced by said at least one magnetic field source, to transfer movement to the at least one planar sheet.

48. The system, according to claim 47, wherein, when the at least one planar sheet is in position and coupled to said at least one magnetizer bar, said at least one magnetizer bar is structured and arranged to rotate to move the at least one planar sheet through said at least one first magnetic-flux field region.

49. The system, according to claim 48, further comprising at least one planar sheet decoupler structured and arranged to decouple the at least one planar sheet from said at least one

29

magnetizer bar during movement of the at least one planar sheet through said at least one first magnetic-flux field region.

50. The system, according to claim 49, wherein said at least one magnetizer bar is structured and arranged to rotate to move the at least one planar sheet through said at least one first magnetic-flux field region at a rate from about 10 feet per minute to about 50 feet per minute.

51. The system, according to claim 50, wherein said at least one magnetizer bar rotates to move the at least one planar sheet through said at least one first magnetic-flux field region at a rate of at about 15 feet/min.

52. The system, according to claim 43, wherein said at least one magnetizer bar comprises at least one magnetizing portion comprising from about 10 to about 20 laminations per inch.

53. The system, according to claim 52, wherein said at least one magnetizing portion comprises exactly 16 laminations per inch.

54. The system, according to claim 53, wherein said at least one magnetizing portion comprises a magnetic field of about 4000 Gauss to about 5000 Gauss.

55. The system, according to claim 49, wherein said at least one sheet decoupler comprises at least one planar rigid decoupler plate.

56. The system, according to claim 55, wherein said at least one planar rigid decoupler plate comprises a plurality of apertures structured and arranged to permit protrusion of at least one portion of said at least one magnetizer bar to assist movement of the at least one planar sheet.

57. The system, according to claim 56, wherein said at least one planar rigid decoupler plate mounts to said at least one enclosure.

58. The system, according to claim 57, wherein said at least one planar rigid decoupler plate divides said at least one enclosure into:

- a) at least one operation-isolated-region structured and arranged to assist protection of said at least one magnetizer and said at least one rotary movement generator from external interaction, during operation of said at least one magnetizer; and
- b) at least one operation-accessible-region structured and arranged to permit user access during operation of said at least one magnetizer.

59. The system, according to claim 42, further comprising at least one user-adjustable planar sheet feeder structured and arranged to user-adjustably feed the at least one planar sheet through said at least one first magnetic-flux field region.

30

60. The system, according to claim 59, wherein said at least one user-adjustable planar sheet feeder accepts a sheet width of less than about 13 inches.

61. The system, according to claim 59, wherein said at least one user-adjustable planar sheet feeder collapses to allow containment in said at least one enclosure when stored.

62. The system, according to claim 42, further comprising at least one magnetic field source aligner structured and arranged to align said at least one first magnetic field source above the movement track and said at least one second magnetic field source below the movement track in such manner as to maximize said at least one magnetic-flux field region crossing the movement track.

63. The system, according to claim 62, each said at least one first magnetic field source is encased to provide at least one smooth surface.

64. The system, according to claim 63, wherein the encasing material allows maximum transmission of magnetic field.

65. The system, according to claim 64, wherein the encasing material comprises brass.

66. A system, relating to enabling magnetization of at least one planar sheet of flexible magnetizable material, said system comprising:

- a) at least one magnetizer structured and arranged to provide at least one magnetic field source;
- b) at least one positioner structured and arranged to permit positioning the at least one planar sheet into at least one magnetizing interaction relationship with said at least one magnetizer;
- c) at least one enclosure structured and arranged to enclose said at least one magnetizer and said at least one positioner; and
- d) at least one hand-carrier structured and arranged to permit hand-carrying, with one hand, of said at least one enclosure;
- e) wherein said at least one magnetizer magnetizes the at least one planar sheet through such at least one magnetizing interaction relationship;
- f) wherein the at least one planar sheet, when magnetized, is capable of magnetically adhering to at least one magnetically receptive material; and
- g) wherein said at least one enclosure comprises at least one securable briefcase structured and arranged to provide briefcase securing of said at least one enclosure.

* * * * *